

Smarter and
more sustainable

VRV 5 Heat Recovery



Purpose-built to support the decarbonisation
of commercial buildings

Climate
360^{NET}



Air Conditioning
Product of the Year



Lower CO₂
equivalents



Industry-leading
real life efficiencies



Flexibility to take care
of every room



Variable Refrigerant
Temperature



BLUEVOLUTION

Our commitment to you and the planet



As the climate crisis demands increasingly urgent action, we're continuously building on our commitment to more sustainable practices throughout our supply chain – from design and manufacture right through to our product's end of life (and beyond).

Climate360^{NET}

From lower GWP and recycled refrigerants to improving operational efficiency, Daikin is playing a key part in the decarbonisation of commercial buildings through our **Climate360** programme.

We support landlords, tenants and contractors to stay on target with their own Net Zero ambitions and responsibilities, providing all the evidence they need to meet expectations and changing industry demands.

We do this by helping them understand their embodied carbon and providing calculations based on CIBSE's recommended TM65 methodology – with Environmental Product Declarations (EPDs) coming soon.

Achieving Planet Mark certification, attained by reporting on our carbon footprint and successfully engaging our stakeholders, is our dedication to minimising our environmental impact.

As we work towards making our factories carbon neutral by 2030, we provide access to all the information and data you need when it comes to our Net Zero journey, product specifications and certifications.

That way, you can make informed choices, build confidence throughout the value chain, and stay on target to meet industry standards, now and in the future.



Scan to learn more

LOOP
BY DAIKIN

BLUEvolution

Continuing our path to lower CO₂ equivalent solutions

Innovation and adaptation are at the heart of our decarbonisation strategy. We have a selection of refrigerants to choose from, and we're constantly evaluating our range, determining the most appropriate refrigerant for each application and converting our portfolio to lower GWP options.

For VRV systems, Daikin has assessed various refrigerants based on four criteria: overall environmental impact, energy efficiency, safety and cost-effectiveness. R32 was determined to be the most balanced for direct expansion heat pumps.

Since launching the VRV 5 S-series with R32 in 2020, we continue to expand our VRV portfolio with the launch of the VRV 5 Heat Recovery system and a VRV 5 heat pump in the near future.



VRV 5 S-series
2020

VRV 5 Heat Recovery
2022

VRV 5 Heat Pump

Benefits of R32

R32 refrigerant has a lower Global Warming Potential and higher efficiency compared to R410A, making it the most effective sustainable solution for VRF systems today.

- › **Lower Global Warming Potential (GWP):** only 1/3rd of R410A
- › **Lower refrigerant charge:** 15% less compared to R410A
- › **Higher energy efficiency,** greatly reducing the indirect CO₂ eq. impact
- › **Single component refrigerant,** easy to handle and recycle.

Benefits of VRV systems

VRV systems offer commercial buildings maximum flexibility and peace of mind thanks to the advantages direct expansion (DX) systems have to offer:

- › **More responsive:** Immediate reaction to changing conditions helps avoid overheating
- › **Highly efficient:** Only 2 energy transfer steps are needed (from air to refrigerant, and from refrigerant to air)
- › **Quick and easy to install:** All-in-one box solution without any requirement for field supplied equipment (e.g. gauges, pumps and valves)
- › **Limited space requirements:** All components are integrated, and refrigerant piping is compact.



Lower CO₂ eq. impact, better performance and maximum flexibility



VRV 5 Heat Recovery ensures maximum comfort and efficiency while significantly reducing a building's environmental footprint. What's more its smart, compact and responsive design makes for flexible and easy installation in any commercial building. In fact, it's not just a single champion device – it's a range of cutting-edge solutions and technologies in one sustainable system.

Sustainability

VRV 5 Heat Recovery is taking sustainable climate control to new heights thanks to its innovative and highly efficient new design.

The VRV system is more sustainable over its entire lifecycle, **reducing the indirect CO₂ eq. impact** thanks to a highly effective 3-pipe heat recovery design and market-leading seasonal efficiency with high $\eta_{s,c}$ values of up to 298.3%. This makes it the perfect partner for your BREEAM, LEED or WELL project.

The system is specifically built for R32 refrigerant greatly **reducing** the potential **direct CO₂ eq. impact**.

- › 68% less Global Warming Potential (GWP) than R410A.
- › 15% less refrigerant charge than R410A.
- › A 71% GWP reduction across the entire system.
- › Single component refrigerant charge, easy to re-use and recycle.

Ultra-flexible climate control

Any commercial building can benefit thanks to:

- › Same **pipng flexibility** as R410A.
- › Unmatched outdoor unit **capacity up to 90kW** in heating.
- › Widest range of dedicated R32 indoor units on the market.

It can be installed practically anywhere thanks to:

- › Quiet operation via **5 low sound steps**, bringing sound pressure down to 40dB(A).
- › **High ESP** up to 78Pa allowing concealment indoors.
- › **Wide operation range** up to +46°C in cooling and down to -20°C in heating.



Shîrudo Technology truly sets the VRV 5 Heat Recovery apart



With Shîrudo Technology, you have a fully versatile and responsive system that can accurately control the indoor climate of any room or surface.

- › **Peace of mind** as no additional considerations or time-consuming studies are needed.
- › **Factory-integrated** refrigerant response measures, compliant with the IEC product standard, third-party approved by a notified body.
- › **Easy design and selection** thanks to the integration of VRV Xpress floorplan.
- › With built-in Shîrudo Technology, potential leaks are quickly detected and isolated – greatly reducing direct emissions impact.



Want to know more about the IEC product standard and implementation?
Refer to page 16.






Quick and easy installation & support

VRV 5 Heat Recovery offers quick and easy installation thanks to:

- › The **flow through principle**, reducing the number of brazing points and joints needed
- › A completely redesigned BSSV box that requires **less ceiling height**
- › A **sliding down PCB** for straightforward servicing.




And never fear, support is always here. You'll have access to an extensive network of experts to make installation and maintenance simple and stress-free.

A smart approach to comfort

Daikin's signature Variable Refrigerant Temperature ensures maximum comfort and is completely customisable to meet customers' requirements, with the **widest range of specifically designed R32 indoor units**.


VRV 5 Heat Recovery can match any room size, shape and integration ventilation units for optimum Indoor Air Quality.

Daikin is also committed to constantly innovating our systems to be smarter and easier to control. Our VRV 5 Heat Recovery system is compatible with **Daikin's mini BMS: Intelligent Touch Manager** – a smart energy management system offering real-time data for full control of your energy use. For further ease of use, we offer **intuitive online and voice control** via the Onecta app.

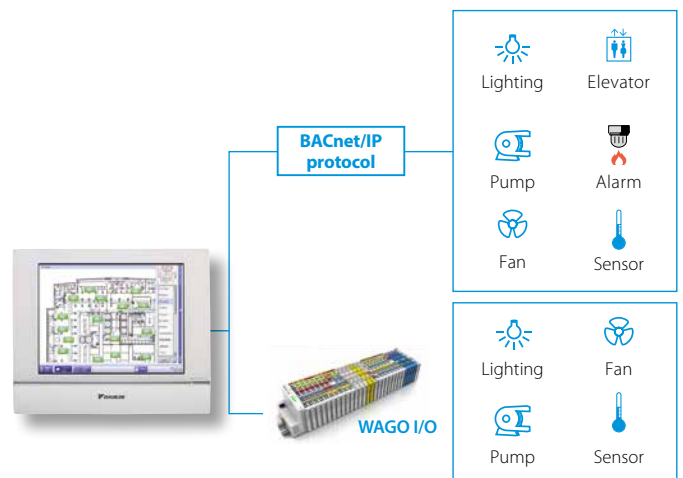

VRV 5 outdoor unit overview


Capacity class (kW)

Model		Product name	8	10	12	14	16	18	20	22	24	26	28	VRV indoor units	Residential indoor units	Hydrobox	HRV units VAM	HRV units EKVDX	AHU connection	Air curtains	Remarks	
Air-cooled heat recovery NEW & UNIQUE VRV5 Heat Recovery	<ul style="list-style-type: none">› Reduced CO₂ equivalent thanks to the use of lower GWP refrigerant R32› Top sustainability over the entire lifecycle› "Free" heating through heat recovery› Tackle small room applications thanks to Shirudo Technology› The perfect personal comfort thanks to simultaneous cooling and heating	 REYA-A	●	●	●	●	●	●	●	●	●	●	●	○			○	○				
			22.4	28.0	33.5	40.0	45.0	50.4	56.0	61.5	67.4	73.5	78.5									
			25.0	31.5	37.5	45.0	50.0	56.5	63.0	69.0	75.0	82.5	87.5									
			Cooling Capacity		22.4	28.0	33.5	40.0	45.0	50.4	56.0	61.5	67.4	73.5	78.5							
			Heating Capacity		25.0	31.5	37.5	45.0	50.0	56.5	63.0	69.0	75.0	82.5	87.5							

● Single unit, ● Multi combination

Branch selector (BS box) overview

Capacity class

Model	Product name	4	6	8	10	12
Multi port BS box <ul style="list-style-type: none"> › Unique range of Branch Selector boxes integrating Shirudo Technology 	BS-A14AV1B 	●	●	●	●	●









VRV 5 outdoor units have the **highest capacity** on the market – up to 90kW





VRV 5 indoor unit overview

Capacity class (kW)

Type	Model		Product name	10	15	20	25	32	40	50	63	71	80	100	125	140	200	250
Ceiling mounted cassette	<div>UNIQUE</div> Round flow cassette	<div>360° air discharge for optimum efficiency and comfort</div> <div>› Auto cleaning function ensures high efficiency</div> <div>› Intelligent sensors save energy and maximize comfort</div> <div>› Flexibility to suit every room layout</div> <div>› Lowest installation height in the market!</div> <div>› Widest choice ever in decoration panel designs and colors</div>	<div>ROUND FLOW</div> <div>FXFA-A</div> <div></div>															
	<div>UNIQUE</div> Fully flat cassette	<div>Unique design that integrates fully flat into the ceiling</div> <div>› Perfect integration in standard architectural ceiling tiles</div> <div>› Blend of iconic design and engineering excellence</div> <div>› Intelligent sensors save energy and maximize comfort</div> <div>› Small capacity unit developed for small or well-insulated rooms</div> <div>› Flexibility to suit every room layout</div>	<div>FXZA-A</div> <div></div>															
Concealed ceiling	Slim concealed ceiling unit	<div>Slim design for flexible installation</div> <div>› Compact dimensions enable installation in narrow ceiling voids</div> <div>› Medium external static pressure up to 44Pa</div> <div>› Only grilles are visible</div> <div>› Small capacity unit developed for small of well-insulated rooms</div> <div>› Reduced energy consumption thanks to DC fan motor</div>	<div>FXDA-A</div> <div></div>															
	Concealed ceiling unit with medium ESP	<div>Slimmest yet most powerfull medium static pressure unit on the market!</div> <div>› Slimmest unit in class, only 245mm</div> <div>› Low operating sound level</div> <div>› Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths</div> <div>› Automatic air flow adjustment function measures the air volume and static pressure and adjusts it towards the nominal air flow, guaranteeing comfort</div>	<div>UNIQUE FOR R-32</div> <div>FXSA-A</div> <div></div>															
	<div>NEW</div> Concealed ceiling unit with high ESP	<div>ESP up to 270 Pa, ideal for extra large sized spaces</div> <div>› Optimum comfort guaranteed no matter the length of ductwork or type of grilles, thanks to automatic air flow adjustment</div> <div>› Large capacity unit: up to 31.5 kW heating capacity</div>	<div>FXMA-A</div> <div></div>															
Wall mounted	Wall mounted unit	<div>For rooms with no false ceilings nor free floor space</div> <div>› Flat, stylish front panel is more easy to clean</div> <div>› Small capacity unit developed for small of well-insulated rooms</div> <div>› Reduced energy consumption thanks to DC fan motor</div> <div>› The air is comfortably spread up- and downwards thanks to 5 different discharge angles</div>	<div>FXAA-A</div> <div></div>															
Ceiling suspended	<div>NEW</div> Ceiling suspended unit	<div>For wide rooms with no false ceilings nor free floor space</div> <div>› Ideal for comfortable air flow in wide rooms thanks to Coanda effect</div> <div>› Rooms with ceilings up to 3.8m can be heated or cooled very easily!</div> <div>› Can easily be installed in both new and refurbishment projects</div> <div>› Can even be mounted in corners or narrow spaces without any problem</div>	<div>FXHA-A</div> <div></div>															
	<div>NEW & UNIQUE</div> 4-way blow ceiling suspended unit	<div>Unique Daikin unit for high rooms with no false ceilings nor free floor space</div> <div>› Rooms with ceilings up to 3.5m can be heated up or cooled down very easily!</div> <div>› Can easily be installed in both new and refurbishment projects</div> <div>› Flexibility to suit every room layout</div>	<div>FXUA-A</div> <div></div>															
Cooling capacity (kW) ¹				1.1	1.7	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0	22.4	28.0
Heating capacity (kW) ²				1.3	1.9	2.5	3.2	4.0	5.0	6.3	8.0	9.0	10.0	12.5	16.0	18.0	25.0	31.5

(1) Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m

(2) Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m




VRV 5 has the **widest range** of indoor units specifically designed for R32 on the market

Next generation **VRV**




7-segment display for quick and accurate error diagnostics

- › Outdoor unit display for quick on-site settings and easy read out of errors
- › Indication of service parameters for checking basic functions



Refrigerant-cooled PCB

- › Reliable cooling because it is not influenced by ambient air temperature
- › Smaller switchbox for smoother air flow through the heat exchanger, increasing heat exchange efficiency by 5%




Unmatched piping flexibility

- › Longest length up to 165m
- › Total length 1,000m



Asymmetric fan design

- › High ESP up to 78Pa to allow ducting
- › Low sound levels down to 40dB (A)



4-sided, 3-row heat exchanger

- › Thanks to the large surface of the heat exchanger (up to 235m²) VRV units are compact, light and highly efficient



New inverter compressor

- › Specifically developed for R32 refrigerant
- › Back pressure control increasing efficiency in low load operation



Advantages of 3-pipe technology


"Free" heat production

An integrated heat recovery system reuses heat from offices and server rooms to warm other areas.

Maximum comfort

A VRV heat recovery system allows simultaneous cooling and heating.


- › For hotel owners, this means they can freely choose between cooling or heating to create a perfect environment for guests.
- › For offices, it means a perfect working indoor climate for both north and south-facing offices.

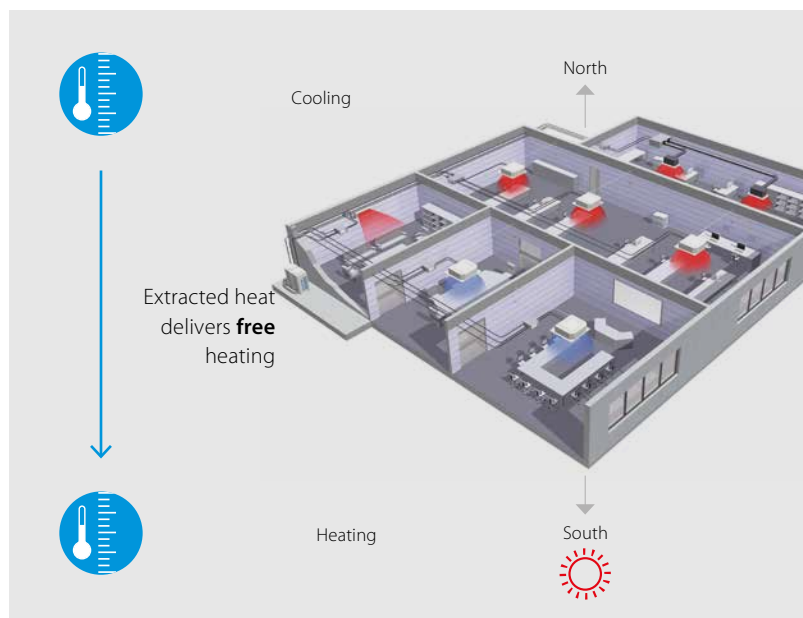

More "free" heat


Daikin 3-pipe technology needs less energy to recover heat, meaning significantly higher efficiency during heat recovery mode. Our system can recover heat at a low condensing temperature because it has dedicated gas, liquid and discharge pipes.

In a 2-pipe system, gas and liquid travel as a mixture so the condensing temperature needs to be higher in order to separate the mixed gas and liquid refrigerant. The higher condensing temperature means more energy is used to recover heat resulting in lower efficiency.

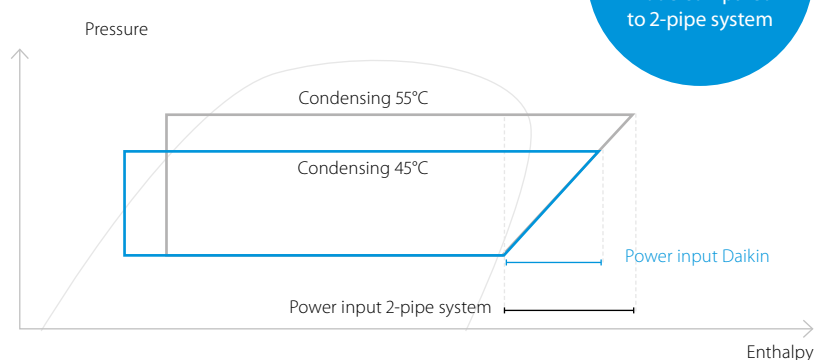

Lower pressure drop means more efficiency


- › Smooth refrigerant flow in 3-pipe system thanks to 2 smaller gas pipes results in higher energy efficiency
- › Disturbed refrigerant flow in large gas pipe on 2-pipe system results in larger pressure drop

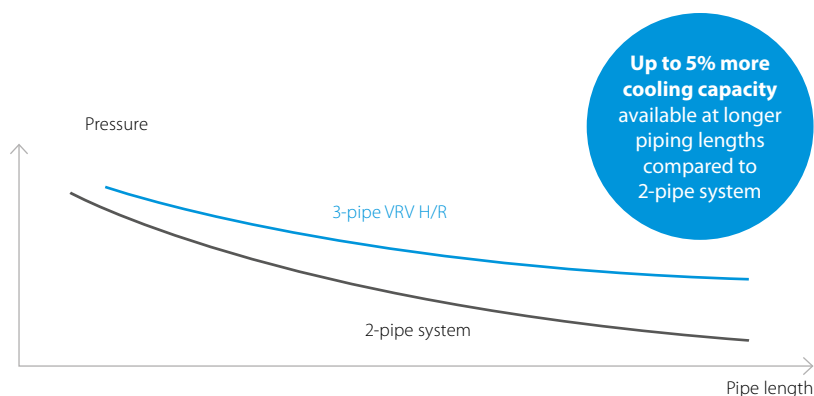

VRV 5 Heat Recovery

Purpose-built to support the decarbonisation of commercial buildings

- › Reduced CO₂ equivalent thanks to the use of lower GWP R32 refrigerant and lower refrigerant charge
- › Single component refrigerant, easy to re-use and recycle
- › Greatest sustainability over the entire lifecycle, thanks to market leading real-life seasonal efficiency
- › "Free" heating through efficient 3-pipe heat recovery, transferring heat from areas requiring cooling to areas requiring heating
- › Tackle small-room applications without any additional measures, thanks to Shīrudo Technology
- › Specially designed indoor units for R32, ensuring low sound and maximum efficiency
- › Simultaneous cooling and heating for the perfect personal comfort of guests/tenants
- › Like-for-like R410A installation flexibility with piping lengths up to 165 meters and a total length of 1,000 meters
- › Sound pressure down to 40dB (A) thanks to 5 low sound steps
- › ESP up to 78 Pa to allow ducting
- › Wide operation range of up to +46°C in cooling and down to -20°C in heating



Lower CO₂ equivalents



Five low sound steps

Widest R32 VRV range in the market



REYA-8-12A



Completely redesigned BSSV boxes for faster installation and easier servicing



R-32

BLUEVOLUTION

REYA-A (8 to 28hp)

VRV 5 Condensing Units Heat Recovery Single Modules



Outdoor Units			5hp (Multi Only) REMA5A	8 hp Single REYA8A	10 hp Single REYA10A	12 hp Single REYA12A	14 hp Single REYA14A	16 hp Single REYA16A	18 hp Single REYA18A	20 hp Single REYA20A
Capacity	Nominal Cooling	kW	14.0	22.4	28.0	33.5	40.0	45.0	50.4	55.9
	Nominal Heating	kW	16.0	25.0	31.5	37.5	45.0	50.0	56.5	63.0
Seasonal Efficiency	Cooling	ηs,c %	–	290.8	282.6	285.3	306.1	281.0	280.6	262.2
	Heating	ηs,h %	–	161.5	170.2	176.4	168.3	167.5	172.5	162.7
Dimensions	Height × Width × Depth	mm	1685 × 930 × 765	1685 × 930 × 765	1685 × 930 × 765	1685 × 930 × 765	1685 × 1240 × 765	1685 × 1240 × 765	1685 × 1240 × 765	1685 × 1240 × 765
Weight		kg	213				296		319	
Electrical Details	Power Supply	Phase / Hz / V	3 / 50 / 380~415							
	Fuse Rating	amps	20	20	25	32	32	40	40	50
	Nominal Running Current – Cooling	amps	5.6	10.5	13.0	15.6	18.5	21.0	27.8	32.8
Refrigerant Circuit	Refrigerant Type		R32							
	Refrigerant Charge	kg	9.0	9.0	9.0	9.0	10.6	10.6	10.6	10.6
Sound Pressure (Cooling)	Cooling	dBA	56.3	56.3	58.0	60.8	58.1	61.4	63.0	67.0
Sound Power (Cooling)	Heating	dBA	58.1	58.1	58.8	61.9	61.3	64.5	64.0	68.0
	Cooling	dBA	78.3	78.3	78.8	82.5	78.7	83.7	83.4	87.9
	Heating	dBA	79.4	79.4	80.7	83.3	82.9	86.3	85.1	89.6
Piping Limits	Maximum Total Length	m	1000							
Piping Connections – Systems	Liquid	inch (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)
	Discharge	inch (mm)	1/2 (12.7)	5/8 (15.9)	5/8 (15.9)	3/4 (19.1)	3/4 (19.1)	3/4 (19.1)	3/4 (19.1)	7/8 (22.2)
	Gas	inch (mm)	5/8 (15.9)	3/4 (19.1)	3/4 (19.1)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)	1 1/8 (28.6)
Operation Range (Cooling)	Min / Max	°CDB	-5 / 46							
Operation Range (Heating)	Min / Max	°CWB	-20 / 15.5							



R-32 BLUEEVOLUTION

REYA-A (10 to 20hp)

VRV 5 Heat Recovery with Continuous Heating

Outdoor Units			10 hp Multi		13 hp Multi		16 hp Multi		18 hp Multi		20 hp Multi	
			REMA5A	REMA5A	REMA5A	REYA8A	REYA8A	REYA8A	REYA8A	REYA10A	REYA8A	REYA12A
Capacity	Nominal Cooling	kW	28.0		36.4		44.8		50.4		55.9	
	Nominal Heating	kW	31.5		41.0		50.0		56.5		62.5	
Seasonal Efficiency	Cooling	ηs,c %	301.9		296.5		293.0		287.5		287.6	
	Heating	ηs,h %	160.6		161.5		170.9		170.5		172.2	
Dimensions	Height	mm	1685	1685	1685	1685	1685	1685	1685	1685	1685	1685
	Width	mm	930	930	930	930	930	930	930	930	930	930
	Depth	mm	765	765	765	765	765	765	765	765	765	765
Electrical Details	Power Supply	Phase / Hz / V	3 / 50 / 380~415									
	Fuse Rating	amps	40		40		40		50		50	
	Nominal Running Current – Cooling	amps	11.2		16		20.9		23.4		26.1	
Refrigerant Circuit	Refrigerant Type		R32									
	Refrigerant Charge	kg	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0
Sound Pressure (Cooling)	Cooling	dBA	59.3		59.3		59.3		60.2		62.1	
	Heating	dBA	61.1		61.1		61.1		61.5		63.4	
Sound Power (Cooling)	Cooling	dBA	81.3		81.3		81.3		81.6		83.9	
	Heating	dBA	82.4		82.4		82.4		83.1		84.8	
Piping Limits	Maximum Length	m	1000									
Piping Connections – Systems	Liquid	inch (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	1/2 (12.7)
	Discharge	inch (mm)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	5/8 (15.9)	5/8 (15.9)	5/8 (15.9)	5/8 (15.9)	5/8 (15.9)	5/8 (15.9)	3/4 (19.1)
	Gas	inch (mm)	5/8 (15.9)	5/8 (15.9)	5/8 (15.9)	3/4 (19.1)	3/4 (19.1)	3/4 (19.1)	3/4 (19.1)	3/4 (19.1)	3/4 (19.1)	7/8 (22.2)
Operation Range (Cooling)	Min / Max	°CDB	-5 / 46									
Operation Range (Heating)	Min / Max	°CWB	-20 / 15.5									

R-32 BLUEEVOLUTION

REYA-A (22 to 28hp)

VRV 5 Heat Recovery with Continuous Heating




Outdoor Units			22 hp Multi		24 hp Multi		26 hp Multi		28 hp Multi	
			REYA10A	REYA12A	REYA8A	REYA16A	REYA12A	REYA14A	REYA12A	REYA16A
Capacity	Nominal Cooling	kW	61.5		67.4		73.5		78.5	
	Nominal Heating	kW	69.0		75.0		82.5		87.5	
Seasonal Efficiency	Cooling	ηs,c %	283.6		283.4		296.2		282.8	
	Heating	ηs,h %	272.1		277.3		286.4		275.6	
Dimensions	Height	mm	1685	1685	1685	1685	1685	1685	1685	1685
	Width	mm	930	930	930	1240	930	1240	930	1240
	Depth	mm	765	765	765	765	765	765	765	765
Electrical Details	Power Supply	Phase / Hz / V	3 / 50 / 380~415							
	Max Fuse Amp (MFA)	amps	63		63		63		63	
	Nominal Running Current – Cooling	amps	28.6		31.5		34.1		36.7	
Refrigerant Circuit	Refrigerant Type		R32							
	Refrigerant Charge	kg	9.0	9.0	9.0	10.6	9.0	10.6	9.0	10.6
Sound Pressure	Cooling	dBA	62.6		62.6		62.7		64.1	
	Heating	dBA	63.6		65.4		64.6		66.4	
Sound Power	Cooling	dBA	84.0		84.8		84.0		86.2	
	Heating	dBA	85.2		87.1		86.1		88.1	
Piping Limits	Maximum Length	m	1000							
Piping Connections – Systems	Liquid	inch (mm)	3/8 (9.5)	1/2 (12.7)	3/8 (9.5)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)
	Discharge	inch (mm)	5/8 (15.9)	3/4 (19.1)	5/8 (15.9)	3/4 (19.1)	3/4 (19.1)	3/4 (19.1)	3/4 (19.1)	3/4 (19.1)
	Gas	inch (mm)	3/4 (19.1)	7/8 (22.2)	3/4 (19.1)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)
Operation Range (Cooling)	Min / Max	°CDB	-5 / 46							
Operation Range (Heating)	Min / Max	°CWB	-20 / 15.5							

Multi branch selector (BSSV) for VRV 5 Heat Recovery

Specifically developed for lower GWP R32

- › **Reduced CO₂ equivalent** thanks to the use of lower GWP R32 refrigerant and lower refrigerant charge
- › Unique range of multi BS boxes allowing **efficient 3-pipe** heat recovery
- › No limitation on room size, thanks to **Shîrudo Technology** (1)
The integrated shut-off valves in the BSSV box ensure that in case of a refrigerant leak only the specific branch is closed off.



Reduced CO₂
equivalent




Flexibility to take care
of every room


Completely redesigned for faster installation and easier servicing

- › Faster installation thanks to **Refrigerant Flow Through** reducing the number of brazing points and joint kits


VRV 5: only 24 brazings point and no joint kits

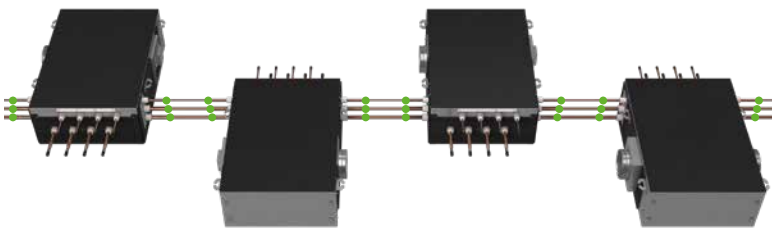


VRV 5: 39 brazing points and 3 joint kits

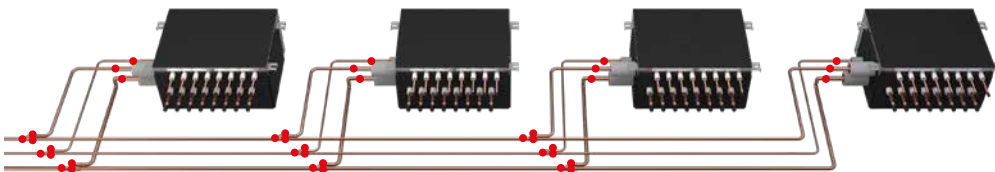

- › Easy servicing in false ceilings thanks to **sliding down PCB**

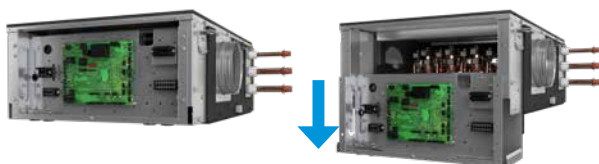

- › Limited ceiling void required as the box can be installed at just 5mm from the ceiling

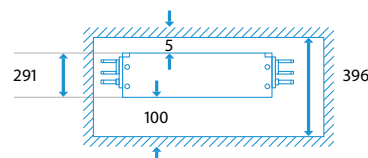

(1) Refer to Xpress selection software to ensure compliance to specific product standard. Field supplied duct and fan might be required to install the BS box in very small spaces

- › Unique range of multi BS boxes allowing efficient 3-pipe heat recovery
- › **NEW** No limitation on room size, thanks to Shirudo Technology (1)
- › **NEW** Faster installation thanks to Refrigerant Flow Through reducing the number of brazing points and joint kits
- › **NEW** Easy servicing in false ceilings thanks to sliding down PCB
- › **NEW** Limited ceiling void required as the box can be installed at just 5mm from the ceiling
- › **NEW** Quick on-site settings, indication of service parameters and easy read out of errors thanks to 7 segment display
- › Up to 16kW capacity available per port
- › Connect up to 250 class unit (28kW) by combining 2 ports
- › No limit on unused ports allowing phased installation
- › Faster installation thanks to open port connection
- › Allows multi tenant applications
- › Connectable to REYA-A heat recovery units



		BS4A14AV1B	BS6A14AV1B	BS8A14AV1B	BS10A14AV1B	BS12A14AV1B	
Connectivity	Maximum number of connectable indoor units (per BS box)	20	30	40	50	60	
	Maximum number of connectable indoor units per branch	5	5	5	5	5	
	Number of branches	4	6	8	10	12	
	Maximum capacity index of connectable indoor units (per BS box)	400	600	750			
	Maximum capacity index of connectable indoor units per branch	140 per port 250 if 2 ports are combined					
Piping restrictions	Maximum piping length between BSSV box and indoor unit	40					
Flowthrough of header pipes	Total amount of ports allowed in flowthrough	16					
	Maximum allowed amount of BSSV box in flowthrough	4 (4 × 4 port BSSV box = 16 ports)					
	Maximum capacity index of indoor units connected to all BSSV box in flowthrough combined	750					
General	Refrigerant type	R32					
	Unit weight	kg	40	56	65	83	89
	Power supply	V	220-240 V / 50 Hz / 1 Phase				
	Installation direction	Horizontal (0° – max 1° toward drain opening)					
	Drain piping	VP20 (ID, 20mm/OD, 26mm)					
	Unit casing	Galvanized steel plate					
	Height	mm	291	291	291	291	291
	Max Fuse Amps (MFA)	amps	6	6	6	6	6
	Width (casing only)	mm	600	1000	1000	1400	1400
	Width (casing + header piping)	mm	870	1270	1270	1670	1670
	Depth (casing only)	mm	845	845	845	845	845
	Depth (casing + branch piping)	mm	1039	1039	1039	1039	1039
	Piping connection type	Braze					
	Main pipe size – Suction gas	inch (mm)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)
	Main pipe size – HP/LP gas	inch (mm)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)	7/8 (22.2)
	Main pipe size – liquid	inch (mm)	5/8 (15.9)	5/8 (15.9)	5/8 (15.9)	5/8 (15.9)	5/8 (15.9)
	Branch pipe size – gas	inch (mm)	3/8 (9.5) / 1/2 (12.7) / 5/8 (15.9)				
	Branch pipe size – liquid	inch (mm)	1/4 (6.4) / 3/8 (9.5)				



Did you know ...

different standards regarding F-gas safety regulations exist?

Refrigerants can be classified according to 2 safety groups:

- › Flammability (1, 2L, 2, 3): covered by the specific heat pump standard **IEC60335-2-40 (Ed. 6)** as it prevails over EN378:2016
- › Toxicity (A or B): covered by the generic standard on refrigerants **EN378:2016**.

Shirudo Technology focuses on offering maximum flexibility within the IEC60335-2-40 (Ed. 6) requirements as limitations for flammability of A2L refrigerants are stricter than the ones for toxicity.

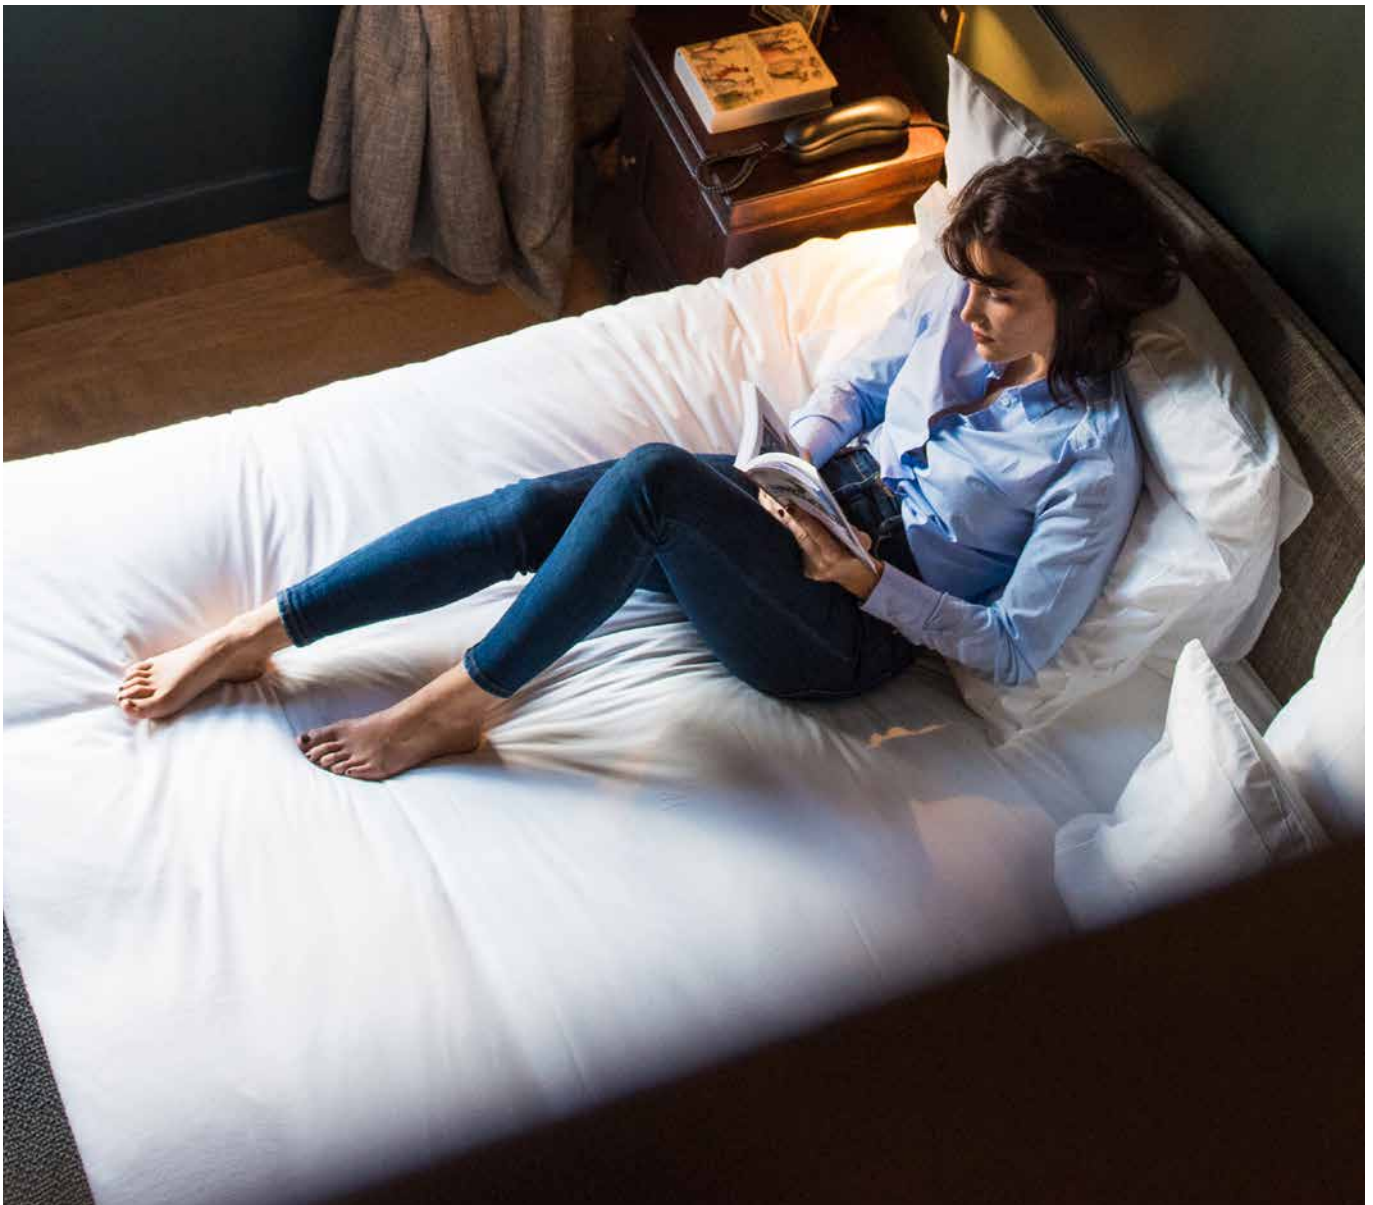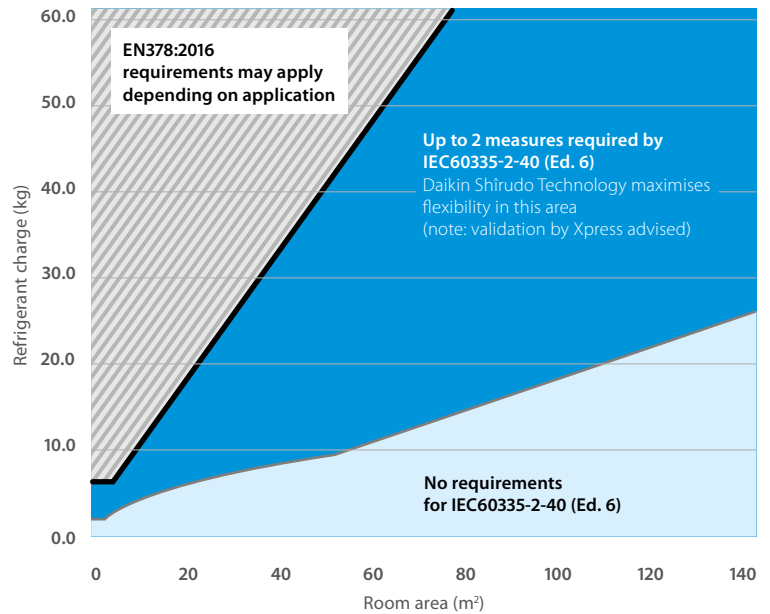

Peace of mind



With Shîrudo Technology, Daikin ensures compliance to the product standard IEC60335-2-40 (Ed. 6) for indoor units. With factory-integrated refrigerant control measures, these systems are also the quickest and most flexible to design.

There is **no need for complex and time consuming calculations**, even for small room applications. And BSSV boxes come with a ventilated enclosure for quick and simple integration of any potential additional measures – making installation in demanding spaces easier than ever.

For stress-free design of any commercial building, validate your project in our Xpress software, featuring floor plan integration.


Refrigerant control measures factory-integrated

Shîrudo Technology includes 2 factory measures and sensors built into a VRV 5 system.


Integrated sensors to detect refrigerant leak.
Leak detection activates:

1 Audible and visual alarm

- › Integrated in the Madoka wired remote controller
- › In case an additional supervisor alarm is needed it can be easily integrated

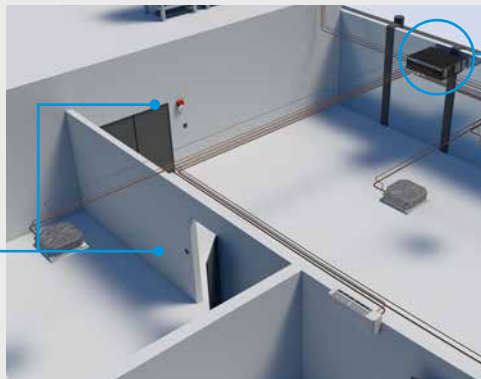

Example for VRV 5 Heat Recovery



2 Refrigerant recovery and shut-off valves

- › Shut off valves of the affected refrigerant branch are closed, containing the leak
- › The rest of the system remains in operation

Compliance taken care of































- › No study or calculations needed on where and how to install outdoor or indoor units.
- › No need for studies to decide if and what safety measures are required.
- › Third party CB certified by a notified body (SGS CEBEC).

Automatic, real time leak detection and refrigerant containment controls

- › Fully compliant to product standard (IEC60335-2-40), reducing the risk of direct CO₂ eq. impact from a refrigerant leak.
- › Real-time leak detection sensors, triggering refrigerant containment safety measures in the unlikely event of a leak.

(1) Refer to Xpress selection software to ensure compliance to specific product standard.
Field supplied duct and fan may be required to install the BS box in very small spaces.

VRV 5 indoor unit benefit overview

VRV 5 indoor unit benefit overview			Ceiling mounted cassette units		Concealed ceiling units			Wall mounted unit	Ceiling suspended units	
			FXFA-A	FXZA-A	FXDA-A	FXSA-A	NEW FXMA	FXAA-A	NEW FXHA-A	NEW FXUA-A
										
We care	 Home leave operation	Maintains the indoor temperature at your specified comfort level during absence, thus saving energy.	●	●	●	●	●	●	●	●
	 Fan only	The unit can be used as fan, blowing air without heating or cooling.	●	●	●	●	●	●	●	●
	 Auto cleaning filter	The filter automatically cleans itself. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance.	○		○					
	 Floor and presence sensor	The presence sensor directs the air away from any person detected in the room, when the air flow control is on. The floor sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor.	○	○						
Comfort	 Draught prevention	When starting to warm up or when the thermostat is off, the air discharge direction is set horizontally and the fan to low speed, to prevent draught. After warming up, air discharge and fan speed are set as desired.	●	●						●
	 Whisper quiet	Daikin indoor units are whisper quiet. Also the outdoor units are guaranteed not to disturb the quiet of the neighbourhood.	●	●	●	●		●		
	 Auto cooling-heating changeover	Automatically selects cooling or heating mode to achieve the set temperature.	●	●	●	●	●	●	●	●
Air treatment	 Air filter	Removes airborne dust particles to ensure a steady supply of clean air.	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)
Humidity control	 Dry programme	Allows humidity levels to be reduced without variations in room temperature.	●	●	●	●	●	●	●	●
Air flow	 Ceiling soiling prevention	Prevents air from blowing out too long in horizontal position, to prevent ceiling stains.	●	●						
	 Vertical auto swing	Possibility to select automatic vertical moving of the air discharge flaps for efficient air and temperature distribution throughout the room.	●	●				●	●	●
	 Fan speed steps	Allows to select up to the given number of fan speed.	5 + auto	3 + auto	3	3 + auto	3 (50-125) 3 + auto (200-250)	3 + auto	3	3 + auto
	 Individual flap control	Individual flap control via the wired remote controller enables you to easily fix the position of each flap individually, to suit any new room configuration. Optional closure kits are available as well.	●	●						●
Remote control & timer	 Onecta controller (BRP069C51)	Control your indoor climate from any location via smartphone or tablet.	○	○	○	○	○	○	○	○
	 Weekly timer	Can be set to start heating or cooling anytime on a daily or weekly basis.	○	○	○	○	○	○	○	○
	 Infrared remote control	Starts, stops and regulates the air conditioner from a distance.	○ (1)	○ (1)	○ (1)	○ (1)	○ (1)	○ (1)	○ (1)	○ (1)
	 Wired remote control	Starts, stops and regulates the air conditioner.	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)	● (3)
	 Centralised control	Starts, stops and regulates several air conditioners from one central point.	○	○	○	○	○	○	○	○
Other functions	 Auto-restart	The unit restarts automatically at the original settings after power failure.	●	●	●	●	●	●	●	●
	 Self-diagnosis	Simplifies maintenance by indicating system faults or operating anomalies.	●	●	●	●	●	●	●	●
	 Drain pump kit	Facilitates condensation draining from the indoor unit.	●	●	●	●	●	○	○	●
	 Multi tenant	The indoor unit's main power supply can be turned off when leaving the hotel or office building.	●	●	●	●		●		

● standard, ○ optional

(1) Must be combined with Madoka wired remote controller.

(2) Pre filter

(3) BRC1H52W/S/K is a required option



The most comfortable cassette
just got better

New round flow cassette



- › **Bigger louvers** and **new sensor logic** further improves equal air distribution in the room
- › **Widest ever choice in panels** for cassette units, with up to 8 different panels



Black auto cleaning panel



Black designer panel




Full white standard panel




White designer panel

- › Comes with the known benefits: **360° air flow discharge** and **intelligent sensors**



- › **Auto-cleaning** panels available in black and white

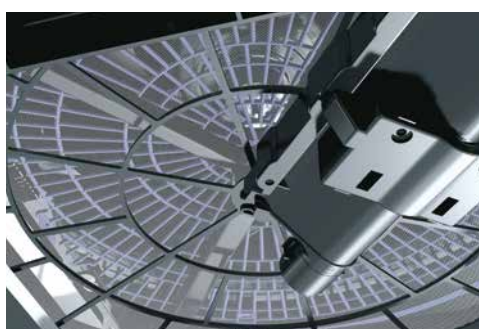

Auto-cleaning filter


Dust can simply be removed using a vacuum cleaner without opening the unit.

* Available as an option


Round flow cassette

360° air discharge for optimum efficiency and comfort

- › Optimised design for R32 refrigerant
- › Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Lowest installation height in the market: 214mm for class 20-63
- › Optional fresh air intake
- › Standard drain pump with 675mm lift increases flexibility and installation speed



FXFA-A



BRC1H52W, BRP069C51



White panel



White auto cleaning panel



Black panel



Black design panel

Indoor Units			FXFA20A	FXFA25A	FXFA32A	FXFA40A	FXFA50A	FXFA63A	FXFA80A	FXFA100A	FXFA125A
Capacity	UK Total Cooling	kW	1.50	2.00	2.50	3.10	3.80	4.90	6.20	7.60	9.60
	UK Sensible Cooling	kW	1.20	1.70	2.00	2.40	2.90	3.70	4.70	6.00	7.60
	Nominal Cooling	kW	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00
	Nominal Heating	kW	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00
Air Flow Rate	High	m³/sec	0.213	0.213	0.213	0.247	0.252	0.277	0.388	0.480	0.550
	Nom	m³/sec	0.178	0.178	0.178	0.210	0.213	0.222	0.322	0.353	0.457
	Low	m³/sec	0.148	0.148	0.148	0.173	0.178	0.178	0.230	0.230	0.343
Dimensions	Height x Width x Depth	mm	204x840x840						246x840x840		
Weight		kg	18	18	18	19	21	21	24	24	26
Standard Decoration Panels	Model		Roundflow BYCQ140E white (standard panel) / Roundflow BYCQ140EB black								
	Colour		Pure White (RAL 9010) / Black (RAL9005)								
	Dimensions H x W x D	mm	65x950x950								
	Weight	kg	5.5								
Fully White Decoration Panel	Model		Roundflow with white louvres BYCQ140EW								
	Colour		Pure White (RAL 9010)								
	Dimensions H x W x D	mm	65x950x950								
	Weight	kg	5.5								
Self Cleaning Decoration Panels	Model		Roundflow self-cleaning BYCQ140EGF white / Roundflow self-cleaning BYCQ140EGFB black								
	Colour		Pure White (RAL 9010) / Black (RAL9005)								
	Dimensions H x W x D	mm	148x950x950								
	Weight	kg	10.3								
Electrical Details	Running Current	amps	0.2	0.2	0.2	0.2	0.3	0.3	0.5	0.7	1.2
	Power Supply	Phase / Hz / V	1 / 50 / 230								
	Max Fuse Amp	amps	6.0								
Sound Level	Sound	High	dBA	31.0	31.0	31.0	33.0	33.0	35.0	38.0	45.0
	Pressure	Nom	dBA	29.0	29.0	29.0	31.0	31.0	33.0	34.0	41.0
		Low	dBA	28.0	28.0	28.0	29.0	29.0	30.0	30.0	36.0
	Sound Power		dBA	49.0	49.0	49.0	51.0	51.0	53.0	55.0	61.0
Piping Connections	Liquid	inch (mm)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	3/8 (9.5)	3/8 (9.5)
	Gas	inch (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	5/8 (15.9)	5/8 (15.9)

Fully Flat Cassette

Design and ingenuity in one



Why choose our fully flat cassette

- › Unique design that integrates fully flat into the ceiling
- › Advanced technology and outstanding efficiency combined
- › Quietest cassette available on the market

FXZQ-A



Choice between grey or white panel

Benefits for the installer

- › Unique product design
- › Quietest unit in the market (25dBA)
- › The user-friendly remote control, available in several languages, enables the easy set-up of sensor option and control of the individual flap position
- › Matches European design trends.

Benefits for the consultant

- › Unique product design
- › Blends seamlessly into any modern office
- › The ideal product to improve BREEAM score/EPBD in combination with Sky Air (FFA*) or VRV IV heat pump units (FXZQ*).


Benefits for the end user

- › Engineering excellence and unique design in one
- › Quietest unit in the market (25dBA)
- › Perfect working conditions: no more cold draughts
- › Save up to 27% on your energy bill thanks to the optional sensors
- › Flexible usage of space and suits any room configuration thanks to individual flap control
- › User-friendly remote control, available in several languages.


Fully flat cassette

Unique design in the market that integrates fully flat into the ceiling

- › Optimised design for R32 refrigerant
- › Fully flat integration in standard architectural ceiling tiles, leaving only 8mm
- › Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- › Two optional intelligent sensors improve energy efficiency and comfort
- › 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!




FXZA-A



BRC1H52W, BRP069C51



- › Optional fresh air intake
- › Standard drain pump with 630mm lift increases flexibility and installation speed




Indoor Units			FXZA15A	FXZA20A	FXZA25A	FXZA32A	FXZA40A	FXZA50A	FXFA80A	FXFA100A	FXFA125A
Capacity	UK Total Cooling	kW	1.80	2.30	2.90	3.60	4.50	5.70	7.20	9.00	11.30
	UK Sensible Cooling	kW	1.60	1.90	2.60	3.00	3.60	4.60	5.80	6.90	8.60
	Nominal Cooling	kW	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00
	Nominal Heating	kW	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00
Air Flow Rate	High	m³/sec	0.213	0.213	0.213	0.247	0.252	0.277	0.388	0.480	0.550
	Nom	m³/sec	0.178	0.178	0.178	0.210	0.213	0.222	0.322	0.353	0.457
	Low	m³/sec	0.148	0.148	0.148	0.173	0.178	0.178	0.230	0.230	0.343
Dimensions	Height x Width x Depth	mm	204 x 840 x 840						246 x 840 x 840		288 x 840 x 840
Weight		kg	18	18	18	19	21	21	24	24	26
Standard Decoration Panels	Model		Roundflow BYCQ140E white (standard panel) / Roundflow BYCQ140EB black								
	Colour		Pure White (RAL 9010) / Black (RAL9005)								
	Dimensions H x W x D	mm	65 x 950 x 950								
	Weight	kg	5.5								
Fully White Decoration Panel	Model		Roundflow with white louvres BYCQ140EW								
	Colour		Pure White (RAL 9010)								
	Dimensions H x W x D	mm	65 x 950 x 950								
	Weight	kg	5.5								
Self Cleaning Decoration Panels	Model		Roundflow self-cleaning BYCQ140EGF white / Roundflow self-cleaning BYCQ140EGFB black								
	Colour		Pure White (RAL 9010) / Black (RAL9005)								
	Dimensions H x W x D	mm	148 x 950 x 950								
	Weight	kg	10.3								
Electrical Details	Running Current	amps	0.2	0.2	0.2	0.2	0.3	0.3	0.5	0.7	1.2
	Power Supply	Phase / Hz / V	1 / 50 / 230								
	Max Fuse Amp	amps	6.0								
Sound Level	Sound Pressure	High	dBA	31.0	31.0	31.0	33.0	33.0	35.0	38.0	43.0
		Nom	dBA	29.0	29.0	29.0	31.0	31.0	33.0	34.0	37.0
		Low	dBA	28.0	28.0	28.0	29.0	29.0	30.0	30.0	36.0
	Sound Power		dBA	49.0	49.0	49.0	51.0	51.0	53.0	55.0	61.0
Piping Connections	Liquid	inch (mm)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	3/8 (9.5)	3/8 (9.5)
	Gas	inch (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	5/8 (15.9)	5/8 (15.9)

Slim concealed ceiling unit


Slim design for flexible installation

- › Optimised design for R32 refrigerant
- › 10 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › Compact dimensions, can easily be mounted in a ceiling void of only 240mm



SERIE A (15, 20, 25, 32)




- › Medium external static pressure up to 44Pa facilitates unit use with flexible ducts of varying lengths
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Optional auto cleaning filter option ensures maximum efficiency, comfort and reliability by regular filter cleaning
- › Flexible installation, as the air suction direction can be altered from rear to bottom suction

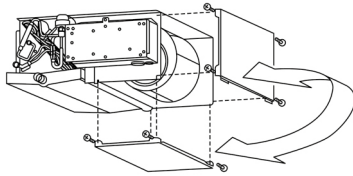

- › Standard drain pump with 600mm lift increases flexibility and installation speed

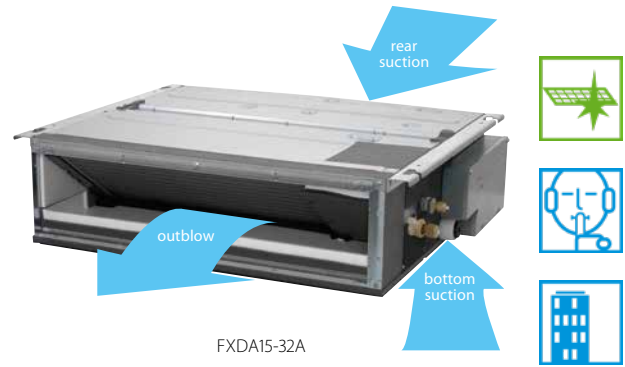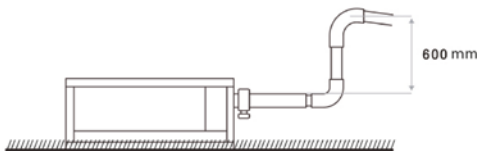

FXDA15-32A



BRC1H52W, BRP069C51

Indoor Units			FXDA10A	FXDA15A	FXDA20A	FXDA25A	FXDA32A	FXDA40A	FXDA50A	FXDA63A
Capacity	UK Total Cooling	kW	0.70	1.20	1.50	2.00	2.60	3.20	3.90	5.00
	UK Sensible Cooling	kW	0.60	1.00	1.20	1.50	1.90	2.40	3.00	3.80
	Nominal Cooling	kW	1.1	1.7	2.2	2.8	3.6	4.5	5.6	7.1
	Nominal Heating	kW	1.3	1.9	2.5	3.2	4.0	5.0	6.3	8.0
Air Flow Rate	High	m3/sec	0.087	0.108	0.133	0.133	0.133	0.175	0.208	0.275
	Nom	m3/sec	0.082	0.103	0.120	0.120	0.120	0.158	0.183	0.242
	Low	m3/sec	0.078	0.097	0.107	0.107	0.107	0.142	0.167	0.217
External Static Pressure	High	Pa	30	30	30	30	30	44	44	44
	Low	Pa	10	10	10	10	10	15	15	15
Dimensions	Height x Width x Depth	mm	200 x 750 x 620					200 x 950 x 620		200 x 1150 x 620
Weight		kg	22	22	23	23	23	26.5	26.5	30.5
Electrical Details	Running Current	amps	0.2	0.3	0.3	0.3	0.3	0.4	0.5	0.5
	Power Supply	Phase / Hz / V	1 / 50 / 230							
	Max Fuse Amp	amps	6							
Sound Level	Sound Pressure	High	dBA	29.0	32.0	33.0	33.0	33.0	34.0	35.0
		Nom	dBA	28.0	31.0	31.0	31.0	31.0	32.0	33.0
		Low	dBA	26.0	27.0	27.0	27.0	27.0	28.0	29.0
	Sound Power		dBA	48.0	50.0	51.0	51.0	51.0	52.0	53.0
Piping Connections	Liquid	inch (mm)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)
	Gas	inch (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)

Concealed ceiling unit with medium ESP


Slimmest yet most powerful medium static pressure unit on the market

- › Optimised design for R32 refrigerant
- › Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge




- › Quiet operation: down to 25dBA sound pressure level
- › Medium external static pressure up to 150Pa facilitates using flexible ducts of varying lengths
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices, etc.
- › Optional fresh air intake
- › Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required

Fresh air intake opening in casing




* Brings in up to 10% of fresh air into the room

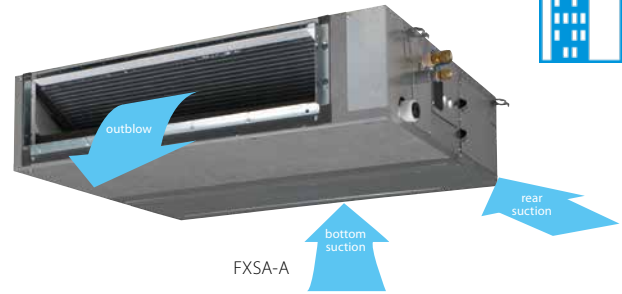

BRC1H52W, BRP069C51

- › Standard built-in drain pump with 625mm lift increases flexibility and installation speed

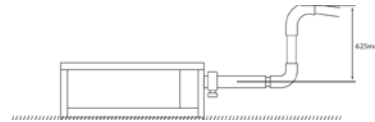


Automatic Airflow Adjustment function

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within $\pm 10\%$

Why?

After installation the real ducting will frequently differ from the initially calculated air flow resistance * the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature

Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically (10 or more fan curves are available on every model), making installation much faster




Indoor Units			FXSA15A	FXSA20A	FXSA25A	FXSA32A	FXSA40A	FXSA50A	FXSA63A	FXSA80A	FXSA100A	FXSA125A	FXSA140A
Capacity	UK Total Cooling	kW	1.10	1.50	2.00	2.50	3.10	3.90	4.80	6.20	7.80	10.20	11.20
	UK Sensible Cooling	kW	0.90	1.20	1.50	2.00	2.50	3.20	3.90	4.90	6.30	7.80	9.00
	Nominal Cooling	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	16.0
	Nominal Heating	kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	18.0
Air Flow Rate	High	m³/sec	0.145	0.150	0.150	0.158	0.250	0.253	0.350	0.383	0.533	0.600	0.650
	Nom	m³/sec	0.125	0.125	0.125	0.133	0.208	0.208	0.300	0.325	0.450	0.525	0.567
	Low	m³/sec	0.108	0.108	0.108	0.117	0.183	0.183	0.250	0.267	0.383	0.433	0.467
External Static Pressure	High	Pa	150	150	150	150	150	150	150	150	150	150	150
	Low	Pa	30	30	30	30	30	30	30	40	40	50	50
Dimensions	Height x Width x Depth	mm	245 x 550 x 800				245 x 700 x 800		245 x 1000 x 800		245 x 1400 x 800		245 x 1550 x 800
Weight		kg	23.5	23.5	23.5	24.0	28.5	29.0	35.5	36.5	46.0	47.0	51.0
Electrical Details	Running Current	amps	0.7	0.7	0.7	0.8	1.3	1.3	1.3	1.5	1.8	2.0	2.7
	Power Supply	Phase / Hz / V	1 / 50 / 230										
	Max Fuse Amp	amps	6										
Sound Level	Sound	High dBA	29.5	30.0	30.0	31.0	35.0	35.0	33.0	35.0	36.0	39.0	41.5
	Pressure	Nom dBA	28.0	28.0	28.0	29.0	32.0	32.0	30.0	32.0	34.0	36.0	38.0
		Low dBA	25.0	25.0	25.0	26.0	29.0	29.0	27.0	29.0	31.0	33.0	34.0
	Sound Power	dBA	54.0	54.0	54.0	55.0	60.0	60.0	59.0	61.0	61.0	64.0	64.0
Piping Connections	Liquid	inches (mm)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)
	Gas	inches (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	5/8 (15.9)	5/8 (15.9)	5/8 (15.9)

Concealed ceiling unit with high ESP

Ideal for large spaces ESP up to 270 Pa


- › Optimised for R32 refrigerant
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › High external static pressure up to 270Pa facilitates extensive duct and grille network
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Fresh-air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required (50-125 class)

Fresh air intake opening in casing



* Brings in up to 10% of fresh air into the room

- › Flexible installation, as the air suction direction can be altered from rear to bottom suction (50-125 class)




Automatic Airflow Adjustment function

Automatically selects the most appropriate fan curve to achieve the units' nominal air flow within $\pm 10\%$

Why?

- After installation the real ducting will frequently differ from the initially calculated air flow resistance *
- the real air flow may be much lower or higher than nominal, leading to a lack of capacity or uncomfortable air temperature
- Automatic Airflow Adjustment function will adapt the unit's fan speed to any ducting automatically
- (10 or more fan curves are available on every model), making installation much faster




FXMA50-80A



BRC1H52W, BRP069C51

- › Standard built-in drain pump with 625mm lift increases flexibility and installation speed (optional for 200-250)

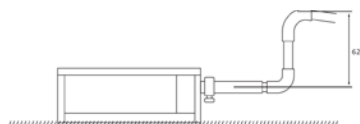

- › High external static pressure up to 270Pa facilitates extensive duct and grille network
- › Large-capacity unit: up to 31.5kW heating capacity

Indoor Units				FXMA50A	FXMA63A	FXMA80A	FXMA100A	FXMA125A
Capacity	UK Total Cooling	kW		3.70	4.80	6.00	7.50	9.40
	UK Sensible Cooling	kW		3.00	3.90	5.10	6.10	7.80
	Nominal Cooling	kW		5.6	7.1	9.0	11.2	14.0
	Nominal Heating	kW		6.3	8.0	10.0	12.5	16.0
Air Flow Rate	High	m³/sec		0.300	0.325	0.417	0.533	0.600
	Nominal	m³/sec		0.275	0.292	0.375	0.458	0.500
	Low	m³/sec		0.250	0.267	0.333	0.383	0.433
External Static Pressure	High	Pa		200	200	200	200	200
	Factory Setting	Pa		100	100	100	100	100
Dimensions	Height x Width x Depth		mm	300x1000x700			300x1400x700	
Weight			kg	35.0			46.0	
Electrical Details	Power Supply	Phase / Hz / V		1 / 50 / 230				
	Max Fuse Amp	amps		16				
Sound Level	Sound Pressure (Cooling)	H / M / L	dBA	41.0	42.0	43.0	43.0	44.0
	Sound Power (Cooling)	H	dBA	61.0	64.0	67.0	65.0	70.0


Wall-mounted unit

For rooms with no false ceilings or free floor space

- › Optimised design for R32 refrigerant
- › Flat, stylish front panel blends easily within any interior décor and is easier to clean
- › Can easily be installed in both new and refurbishment projects
- › The air is comfortably spread up- and downwards thanks to 5 different discharge angles that can be programmed via the remote control
- › Maintenance operations can be performed easily from the front of the unit



FXAA-A



BRC1H52W, BRP069C51




3 fan speeds available!

Indoor Units			FXAA15A	FXAA20A	FXAA25A	FXAA32A	FXAA40A	FXAA50A	FXAA63A
Capacity	UK Total Cooling	kW	1.10	1.50	1.90	2.40	3.00	3.70	4.70
	UK Sensible Cooling	kW	0.90	1.10	1.50	1.90	2.40	3.00	3.90
	Nominal Cooling	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1
	Nominal Heating	kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0
Air Flow Rate	High	m3/sec	0.118	0.132	0.138	0.157	0.203	0.237	0.303
	Low	m3/sec	0.108	0.108	0.108	0.108	0.163	0.182	0.215
Dimensions	Height x Width x Depth	mm	290 x 795 x 266				290 x 1050 x 269		
Weight		kg	12	12	12	12	15	15	15
Electrical Details	Running Current	amps	0.2	0.2	0.3	0.3	0.3	0.4	0.5
	Power Supply	Phase / Hz / V	1 / 50 / 230						
	Max Fuse Amp	amps	6						
Sound Level	Sound	High	dBA	32.0	33.0	35.0	37.5	37.0	41.0
	Pressure	Low	dBA	28.5	28.5	28.5	28.5	33.5	35.5
	Sound Power		dBA	51.0	52.0	53.0	55.0	55.0	58.0
Piping Connections	Liquid	inch (mm)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)	1/4 (6.4)
	Gas	inch (mm)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	3/8 (9.5)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)


Ceiling-suspended unit

For wide rooms with no false ceilings or free floor space

- › Optimised for R32 refrigerant
- › Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle

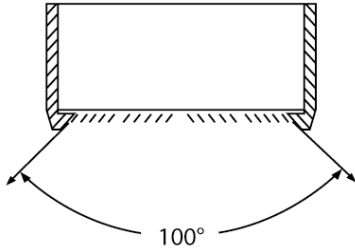

- › Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space

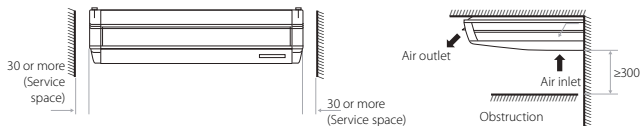

- › Fresh-air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required
- Fresh air intake opening in casing




* Brings in up to 10% of fresh air into the room

- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible



FXHA63A




BRC1H52W, BRP069C51

Indoor Units			FXHA32A	FXHA50A	FXHA63A	FXHA100A
Capacity	UK Total Cooling	kW	2.40	3.70	4.90	7.50
	UK Sensible Cooling	kW	1.90	2.90	3.80	6.00
	Nominal Cooling	kW	3.6	5.6	7.1	11.2
	Nominal Heating	kW	4.0	6.3	8.0	12.5
Air Flow Rate	High	m³/sec	0.208	0.267	0.292	0.450
	Nominal	m³/sec	0.183	0.233	0.250	0.367
	Low	m³/sec	0.167	0.208	0.217	0.317
Dimensions	Height x Width x Depth	mm	235 x 960 x 690	235 x 1270 x 690	235 x 1270 x 690	235 x 1590 x 690
Weight		kg	24	33	33	39
Electrical Details	Power Supply	Phase / Hz / V	1 / 50 / 230			
	Max Fuse Amp	amps	16			
Sound Level	Sound Pressure (Cooling)	H / M / L dBA	36 / 34 / 31	36.5 / 34.5 / 33	37 / 35 / 34	44 / 37 / 34
	Sound Power (Cooling)	H dBA	54.0	54.0	55.0	62.0


4-way blow ceiling-suspended unit

Unique Daikin unit for high rooms with
no false ceilings or free floor space

- › Optimised for R32 refrigerant
- › Even rooms with ceilings up to 3.5m can be heated up or cooled down very easily without capacity loss
- › Can easily be installed in both new and refurbishment projects
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!



- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating and there are no air intake grilles visible
- › Optimum comfort guaranteed with automatic air flow adjustment to the required load
- › 5 different discharge angles between 0 and 60° can be programmed via the remote control




FXUA-A



BRC1H52W, BRP069C51

UNIQUE

- › Standard drain pump with 720mm lift increases flexibility and installation speed



Indoor Units			FXUA50A	FXUA71A	FXUA100A
Capacity	UK Total Cooling	kW	3.80	5.50	7.90
	UK Sensible Cooling	kW	2.90	4.30	6.40
	Nominal Cooling	kW	5.6	8.0	11.2
	Nominal Heating	kW	6.3	9.0	12.5
Air Flow Rate	High	m ³ /sec	0.283	0.367	0.517
	Nominal	m ³ /sec	0.242	0.308	0.425
	Low	m ³ /sec	0.217	0.267	0.350
Dimensions	Height x Width x Depth	mm	198 x 950 x 950		
Weight		kg	26	26	27
Electrical Details	Power Supply	Phase / Hz / V	1 / 50 / 230		
	Max Fuse Amp	amps	16		
Sound Level	Sound Pressure (Cooling)	H / M / L dBA	37 / 35 / 33	40 / 38 / 36	47 / 44 / 40
	Sound Power (Cooling)	H dBA	55.0	58.0	65.0

Options & accessories – **VRV**

Outdoor units

		VRV Heat Recovery	
		REYA8-20A REMA5A	2 module systems
	Heater tape kit – Optional electrical heater to guarantee trouble-free operation in extremely cold and humid climates (one per outdoor unit needed)	5 / 8-12: EKBPH012T 14-20: EKBPH020T	
Kits	Multi-module connection kit (obligatory) – Connects multiple modules into a single refrigerant system		BHFQ23P907

		Ceiling mounted cassette units	
		Round flow (800x800)	4-way (600x600)
		FXFA-A	FXZA-A
Panels	Decoration panel (obligatory for cassette units, optional for others, rear panel for FXLQ)	Standard panels: BYCQ140E (white) / BYCQ140EW (full white)(3) / BYCQ140EB (black) Auto cleaning (5)(6): BYCQ140EGF (white) / BYCQ140EGFB (black) Designer panels: BYCQ140EP (white) / BYCQ140EPB (black)	R32 model: BYFQ60C4W1W (white panel) (19) BYFQ60C4W1S (grey panel) (19) BYFQ60B3W1 (standard panel) (20)
	Panel spacer for reducing required installation height		KDBQ44B60 (Standard panel)
	Sealing kit for 3- or 2-directional air discharge	KDBHQ56B140 (7)	BDBHQ44C60 (white & grey panel)
	Sensor kit	BRYQ140B (white panels) BRYQ140BB (black panels) BRYQ140C (white designer panel) BRYQ140CB (black designer panel) BRC7FA532F (white panels) (7)(15) BRC7FA532FB (black panels) (7)(15) BRC7FB532F (white designer panel) (7)(15) BRC7FB532FB (black designer panel) (7)(15)	R32 models: BRYQ60A3W (white) BRYQ60A3S (grey)
Individual control systems	Infrared remote control (incl. receiver)		BRC7F530W (9)(10) (white panel) BRC7F530S (9)(10) (grey panel) BRC7EB530W (9)(10) (standard panel)
	BRP069C51 – Onecta app Madoka BRC1H52W (White) / BRC1H52S (Silver) / BRC1H52K (Black) User-friendly wired remote controller with premium design	● ● (mandatory)	● ● (mandatory)
Centralised control systems	DCC601A51 – intelligent Tablet Controller	●	●
	DCS601C51 (12) – intelligent Touch Controller	●	●
	DCS302C51 (12) – Central remote controller	●	●
	DCS301B51 (12) (13) – Unified ON/OFF controller	●	●
	RTD-NET – Modbus interface for monitoring and control RTD-10 – Modbus interface for infrastructure cooling RTD-20 – Modbus interface for retail RTD-HO – Modbus interface for hotel KLIC-DI – KNX Interface	● ● ● ● ●	● ● ● ● ●
Building Management System & Standard protocol interfaces for individual control	DCM601A51 – intelligent Touch Manager	●	●
	EKMBDXB – Modbus interface	●	●
	DCM010A51 – Daikin PMS interface	●	●
	DMS502A51 – BACnet Interface	●	●
	DMS504B51 – LonWorks Interface	●	●
Filters	Replacement long life filter, non-woven type	KAF5511D160	KAF441C60
	Auto cleaning filter	see decoration panel	
Wiring and sensors	KRCS – External wired temperature sensor	KRCS01-7B	KRCS01-8B
	K.RSS – External wireless temperature sensor	SB.K.RSS_RFC (EKEWTSC-2 + K.RSS)	SB.K.RSS_FDA (EKEWTSC-1 + K.RSS)
Adapters	Adapter with 2 output signals (Compressor / Error, Fan output)	KRP1BA58 (2)(7)	ERP02A50 (2)
	Adapter with 4 output signals (Compressor / Error, Fan, Aux. heater, Humidifier output)	EKRPI1C12 (2)(7)	EKRPI1C14 (2)
	Adapter for centralised external monitoring/control via dry contacts and setpoint control via 0-140Ω	KRP4A53 (2)(7)	KRP4A53 (2)
	Adapter for external central monitoring/control (controls 1 entire system)		KRP2A52
	Adapter for keycard and/or window contact connection (2)(11)	BRP7A53	BRP7A53 (2)
	External control adapter for outdoor unit (installation on indoor unit)		
	Installation box / Mounting plate for adapter PCBs (For units where there is no space in the switchbox)	KRP1H98A (7) KRP1BC101	KRP1BB101 KRP1BC101
	Wiring kit for Remote ON/OFF or Forced OFF	Standard	Standard
	Relay PCB for output signal of refrigerant sensor	ERP01A51 (2)	ERP01A50 (2)
Others	Drain pump kit	Standard	Standard
	Fresh air intake kit (direct installation type)	KDDP55C160-1 + KDDP55D160-2 (7)(8)	KDDQ44XA60
	Air discharge adapter for round duct		
	L-type piping kit		

- (1) Pump station is necessary for this option
 (2) Installation box is necessary for these adapters
 (3) The BYCQ140EW has white insulation. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140EW decoration panel in environments exposed to concentrations of dirt*
 (4) Not recommended because of the limitation of the functions

- (5) To be able to control the BYCQ140EGF(B) the controller BRC1E or BRC1H* is needed
 (6) The BYCQ140EGF(B) is not compatible with Multi and Split Non-Inverter Outdoor units
 (7) Option not available in combination with BYCQ140EGF(B)
 (8) Both parts of the fresh air intake are needed for each unit
 (9) Cannot be combined with sensor kit
 (10) Independently controllable flaps function not available

BSSV Boxes

BSSV Boxes		VRV Heat Recovery BS-A14AV1B
EKBSDCK	– Duct connection: To connect extraction of BSSV boxes in serial	●
EKBSJK	– Joint kit for branch selector (BS) boxes: To couple 2 BS box branches to connect larger capacity indoor units	●
K-KDU303KVE	– Drain pump kit to expand our VRV portfolio with the launch of the VRV 5 Heat Recovery system and a VRV 5 heat pump in the near future.	●

[illegible]

(11) Only possible in combination with BRC1H* / BRC1E*

(12) When fixing box is required, use KJB212A, KJB311A or KJB411A depending on the size of the controller

(13) Option KEK26-1A (Noise filter) is required when installing DCS301B51.

(14) Wire harness EKEWTSC is necessary

(15) The active airflow circulation function is not available for this controller.

(16) Up to 2 adaptor PCBs can be installed per installation box

(17) Only one installation box can be installed per indoor unit.

(18) VRV R32 indoor units cannot be connected to this controller.

(19) The BYFQ60C4* R32 panels can be connected to R410A indoor units with wire harness EKRS22

(20) Wire harness EKRS23 is necessary



Make the smart, more sustainable choice VRV 5 Heat Recovery

Purpose-built to support the decarbonisation of commercial buildings

Support your customers in future-proofing their buildings with a breakthrough solution for sustainable climate control.

Now, more than ever, we all have a part to play in reducing our environmental impact. That's why Daikin is introducing the VRV 5 Heat Recovery unit with innovative new capabilities that make it a future-proof climate solution. Smarter and more responsive than ever – it offers you and your customers complete peace of mind.

Help your customers reduce their CO₂ footprint now while enjoying maximum comfort and ease of use. Visit www.daikin.co.uk/VRV5HR to learn more about the VRV 5 Heat Recovery unit.

Daikin Airconditioning UK Limited The Heights Brooklands Weybridge Surrey KT13 0NY Tel 01932 879000 daikin.co.uk

FSC

ECPEN23-212 UK

07/2023



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin UK.

Printed in the UK on FSC certified paper from responsible sources.