




## Air purifier

Floor standing type

Model

MC80ZBFVM

# Streamer Air Purifier OPERATIONAL MANUAL

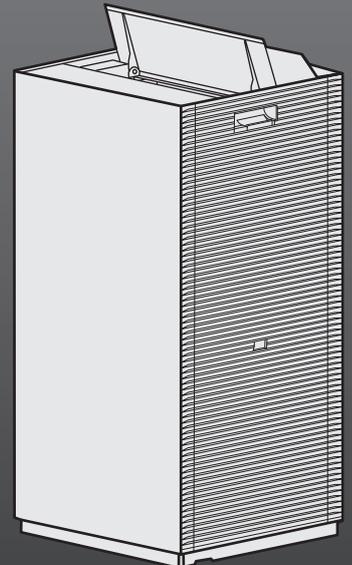

- Thank you for purchasing this air purifier.
- Please read the operation manual carefully and follow it for correct use.

• **Please read the "Safety Precautions" section before use.** ▶ Page 3-5  
Please keep the operation manual in a safe place for later reference.




For Internal Use only  
3P690982-3A



# Contents

## Read First



- Safety Precautions ..... 3
- Usage Precautions ..... 6
- Names of Parts and Operations ..... 7
- Preparation Before Operation..... 13
- Operating the Air Purifier via Smartphone..... 15

## Operation

- Using the Air Purifying Operation ..... 18
- Changing the Airflow rate ..... 19
- Operating MODEs ..... 19
- AUTO FAN / ECONO / ANTI-POLLEN / CIRCULATOR

## Advanced Settings

- Streamer Output Settings ..... 21
- Active Plasma Ion Output ..... 23
- PM2.5 Sensor Sensitivity..... 23
- Monitoring mode within AUTO Operation and ECONO MODE... 25
- Airflow Rate Range for AUTO FAN MODE ..... 25

## Maintenance

- Quick Guide for Maintenance ..... 27
- Dust Collection Filter **Replace** ..... 29
- Streamer Unit **Replace** ..... 30
- When Not Using the Unit for a Prolonged Period ..... 31

## Troubleshooting

- State of the AIR MONITOR indicator and Their Meanings... 32
- FAQs..... 33
- Troubleshooting ..... 34
- Specifications ..... 38
- Separately Sold Parts ..... 39

The images in this manual are for illustrative purposes only.  
 The English text is the original instruction.  
 Other languages are translations of the original instructions.

# Safety Precautions

■ Observe these precautions in order to prevent property damage or injury.

■ The consequences of incorrect use are categorised as follows:

⚠ WARNING	⚠ CAUTION
Failure to follow these instructions properly may result in personal injury or loss of life.	Failure to follow these instructions properly may result in personal injury and property damage.

■ Precautions to be observed are categorised using symbols:

⊘	Never attempt.	!	Be sure to follow the instructions.
---	----------------	---	-------------------------------------

**⚠ WARNING** Observe in order to prevent fire, electric shock or severe injury.

■ Concerning the power supply plug and cord

- ⊘ • **Do not unplug while the unit is in operation.** (This may result in fire and electric shock due to heating)
- **Do not plug in or unplug with wet hands.** (This may result in electric shock)
- **Do not use in such a way that the ratings of the power socket or wiring appliances are exceeded or use a voltage outside of the range AC220-240V.**  
(Fire may result from overheating if the ratings of multi-socket power adaptor, etc., are exceeded)
- **Do not pull on the power supply cord when unplugging.** (Overheating or fire may result from wire breakage)
- **Do not subject to acts that might damage them.**

Such actions include damaging, modifying, forcibly bending, pulling, twisting, bundling up, placing heavy objects on the power supply plug or cord, etc. If the power supply plug or cord is damaged, it must be replaced by the manufacturer, its service agent, or a similar qualified person in order to avoid a hazard.  
(An electric shock, short circuiting, or fire may result from use while damaged)



- ! • **Insert the power supply plug firmly all the way in.**  
Do not use a damaged power supply plug or a loosely fitted power socket.  
(Electric shock, short circuiting or fire due to overheating may result if the power supply plug is not firmly inserted)
- **Periodically wipe dust off the power supply plug with a dry cloth.**  
If the unit is not to be used for a prolonged period, unplug the power supply.  
(Fire may be caused by defective insulation resulting from dust buildup with moisture, etc.)
- **When performing maintenance, inspecting or moving the unit, be sure to turn off and unplug the unit.**  
(An electric shock or injury may result)




■ Do not use in the following places

- ⊘ • **Places where oil or flammable gases are used or may leak.** (Fire or smoke may result from ignition or suction toward the unit, or injury may result from degradation or cracking of plastic)
- **Places where there are corrosive gases or metal dust particles.**  
(Fire or smoke may result from ignition or suction toward the unit)
- **Places where temperature and humidity levels are high or water may scatter, such as a bathroom.** (Fire or an electric shock may result from electrical leakage)
- **Places accessible to small children.** (An electric shock or injury may result)

**⚠ WARNING** Observe in order to prevent fire, electric shock or severe injury.

■ **During use**

- **Do not use chlorinated or acidic detergents.** (Injury may result from degradation or cracking of plastic, or harm may be caused to health from the production of toxic gases)
- **Keep burning cigarettes or incense sticks away from the unit.**  
(Fire or smoke may result from ignition or suction toward the unit)
- **Do not attempt to disassemble, reconstruct or repair the unit yourself.**  
(Fire, an electric shock or injury may result) For repairs, please contact the place of purchase.
- **Do not insert fingers, sticks, or any other item, into the air inlets or air outlet.**  
(An electric shock, injury or damage may result)
- **Do not pour water onto the air outlet or the unit.** (Fire or an electric shock may result)
- **Do not use flammable substances (hair spray, insecticide, etc.) near the unit.**  
**Do not wipe the unit with benzene or thinner.** (An electric shock, fire or cracking may result)



■ **Immediately turn off and unplug the unit if there are any signs of abnormality or damage**

**! Examples of abnormality and malfunction**

- The unit does not operate even if the switch is turned on.
- Current passes through the cord only sometimes if the cord is moved.
- There are abnormal sounds or vibrations during operation.
- The casing of the unit has deformed or is abnormally hot.
- There is a burnt smell. (Malfunction, an electric shock, smoke, fire, etc., may result if the abnormality is not addressed and the unit continues to be used) Contact the place of purchase.

■ **Concerning unit body**

- **Do not block air inlet and air outlet with laundry, cloth, curtain etc..**  
(Air circulation get worse which may cause overheat or fire.)
- **Do not spray with deodorants etc or use it near unit**  
(This may damage the unit)
- **Do not sit or lean on the top of the unit body**  
(This may result from falling or toppling.)




# Safety Precautions

**⚠ CAUTION** Observe in order to prevent electrical leakage, injury or property damage.

## ■ When moving the unit


- **When picking up the unit to move it, handle the unit with caution.**  
(Be sure to always hold the unit using the correct grip.)

Hold these grips  
(2 places)



## ■ During use

- **Small children or immobile persons (due to illness or injury) should not operate the unit by themselves.**
  - ◆ For EU, UK, Turkey:  
This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.  
Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.
  - ◆ For other regions:  
This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
    - Children should be supervised to ensure that they do not play with the appliance.
    - Persons who are heavily intoxicated or have taken sleep medication should not operate the unit.
 (An electric shock, injury or poor health may result)
- **Do not use combustion-based heating devices in places directly exposed to airflow from the air outlet.**  
(Carbon monoxide poisoning due to incomplete combustion of the combustion-based heating device may result)
- **Do not use products that contain fine powder, such as cosmetics, near the unit.**  
(May result in electric shock or damage)
- **Do not operate the unit when fumigating insecticide is in use.**
  - After using insecticide, be sure to sufficiently ventilate the room before operating the unit.  
(Harm may be caused to health from an outflow of accumulated chemical compounds from the outlet)
- **Do not use the unit near a smoke detector.**
  - If the air coming out of the unit flows in the direction of the smoke detector, the response of the smoke detector may be delayed or it may fail to detect smoke.
- **This unit contains radio equipment; the minimum separation distance between the radiating part of the equipment and the user is 30cm.**
- **Frequently ventilate the room when using the unit together with combustion-based heating devices.**
  - Usage of this product is not a substitute for ventilation. (Potential cause of carbon monoxide poisoning)  
This product cannot eliminate carbon monoxide.
- **If the unit is placed within reach of a pet, be careful that the pet does not urinate on the unit or bite on the power supply cord.**  
(Fire, an electric shock or injury may result)




# Usage Precautions

## Precautions when using the unit

- **Do not use for special uses such as preservation of artworks or academic works.**  
(Degradation of preserved items may result)
- **Shorten the maintenance period depending on use environment.**  
In case the unit is used at areas where a lot of people go in and out such as hotel or public facilities, please shorten the maintenance period for pre filter. (May result in damage if prefilter is used while it is clogged)

## Do not use in the following places

- **Positions from where out flowing air flows directly at a wall, furniture, curtains, etc.**  
(Staining or deformation may results)
- **Do not expose to direct sunlight.**  
(May cause discolouration)
- **Do not position near combustion-based heating and other high temperature devices.**  
(Discolouration/deformation due to overheating may result)
- **Do not expose to high levels of electromagnetic waves such as near an electromagnetic cooker, speakers, etc.**  
The unit may not function correctly.
- **Do not expose to direct hot air from heating appliances or near combustion appliances.**  
(The unit may not be able to indicate correct humidity and may be deformed)
- **Do not expose to places where chemicals and pharmaceuticals are used such as hospitals, factories, laboratories, beauty salons, and photographic laboratories.**  
(Volatilised chemicals and solvents may degrade mechanical parts and lead to malfunction)
- **Do not expose to soot (conductive dust) released by candles, aromatic candles, etc.**  
The performance of the filters may be impaired, causing the room to become dirty due to the build-up of dust that is not captured.
- **Do not use cosmetics etc., containing silicone\* near the unit.**  
\* Hair care products (split ends coating agents, hair mousse, hair treatment agents etc.), cosmetics, antiperspirants, antistatic agents, waterproof sprays, lustering agents, glass cleaners, chemical wiping cloths, wax, etc.
  - If an insulator such as silicone adheres to the needle of the Streamer unit, the Streamer discharge may not be generated.
  - The dust collection filter may become clogged up resulting in reduced air purifying capacity.
- **Do not use an ultrasonic humidifier or similar appliance near the unit.**  
The dust collection filter may become clogged up resulting in reduced air purifying capacity

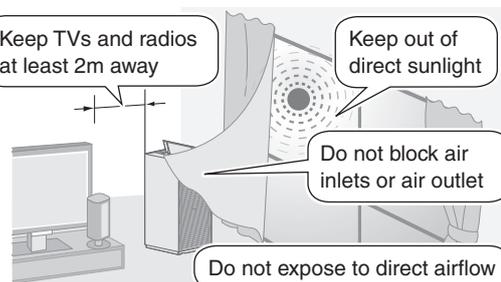

This unit is not intended for use at high altitudes (above 2000m).

### About Streamer discharge and Active Plasma Ion

In some cases the air outlet may emit a slight odour as trace amounts of ozone are generated. However, the amount is negligible and is not harmful to your health.


- This product cannot eliminate the toxic substances in tobacco smoke (carbon monoxide etc.)
- Odours cannot be completely removed if they are being constantly generated (building material odours, pet odours, etc.)

# Names of Parts and Operations


## ⚠ CAUTION

Be sure to always hold the unit using the correct grip. (Injury may result from the unit falling)

### Front

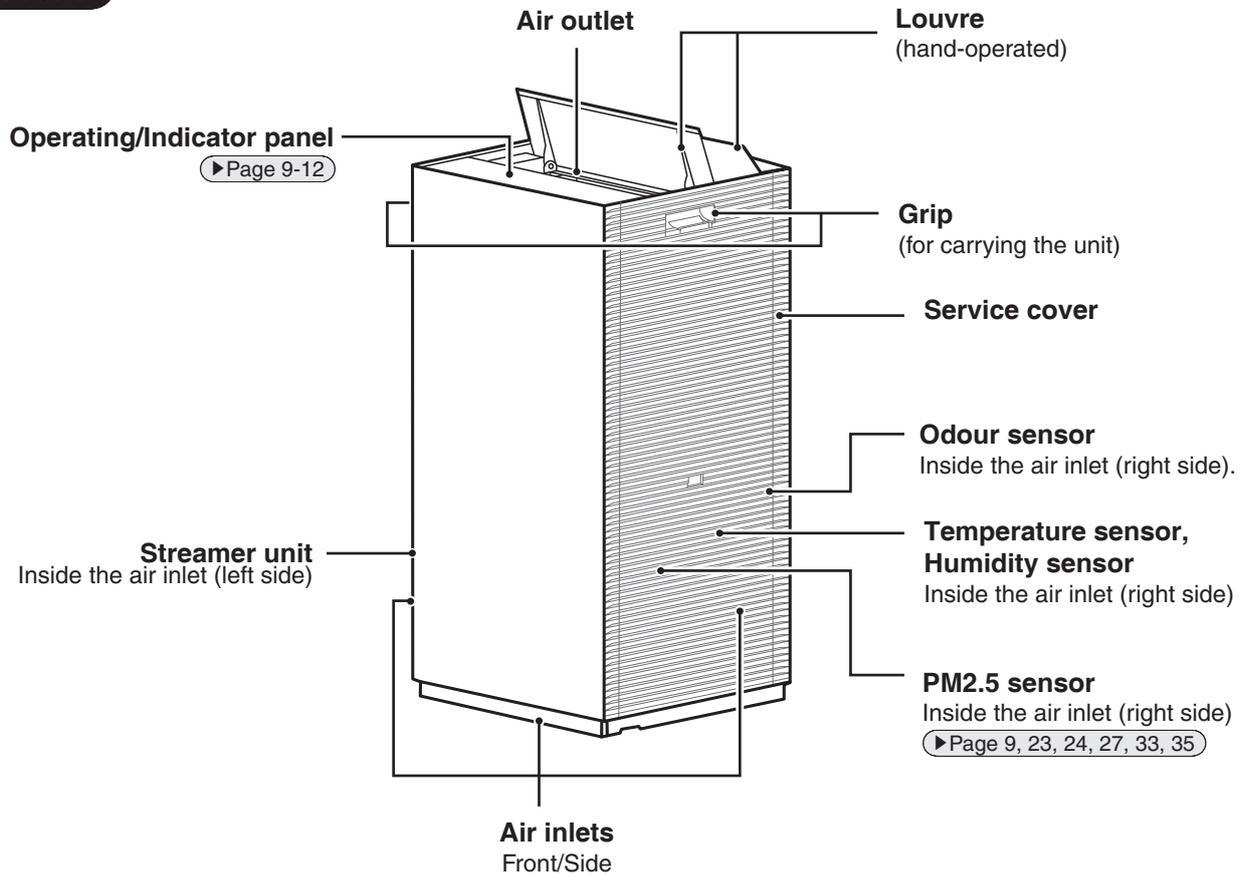

### Back

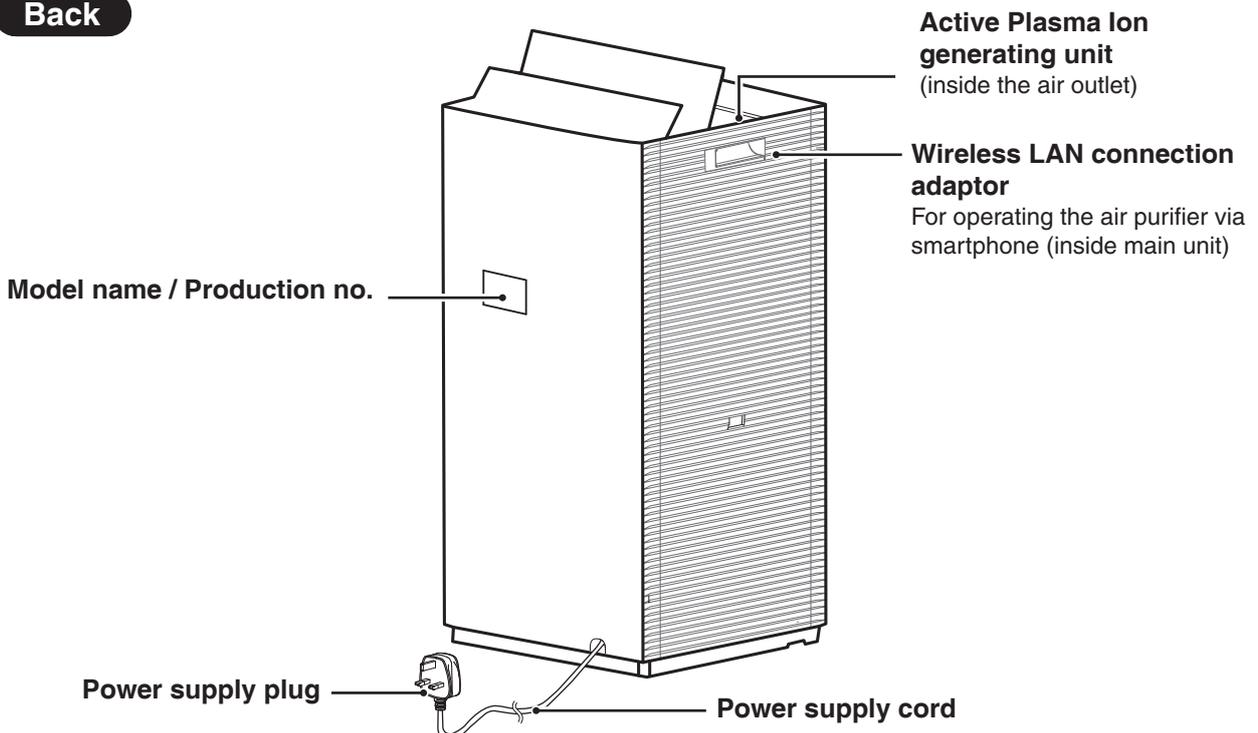

### Main Removable Parts

#### Attention

To prevent malfunction, be sure to only operate the unit with all parts attached.

#### Streamer unit cover

▶Page 30

#### Streamer units

(2 units)

▶Page 30

#### Dust collection filter

(white filter)

▶Page 28, 29, 33

#### Deodorising filter

(black filter)

▶Page 14, 28, 33

#### Service cover

#### Filter fixing unit


▶Page 14, 28

#### Pre-filter

▶Page 27

#### SSID/KEY sticker

(can be checked if the pre-filter is removed)

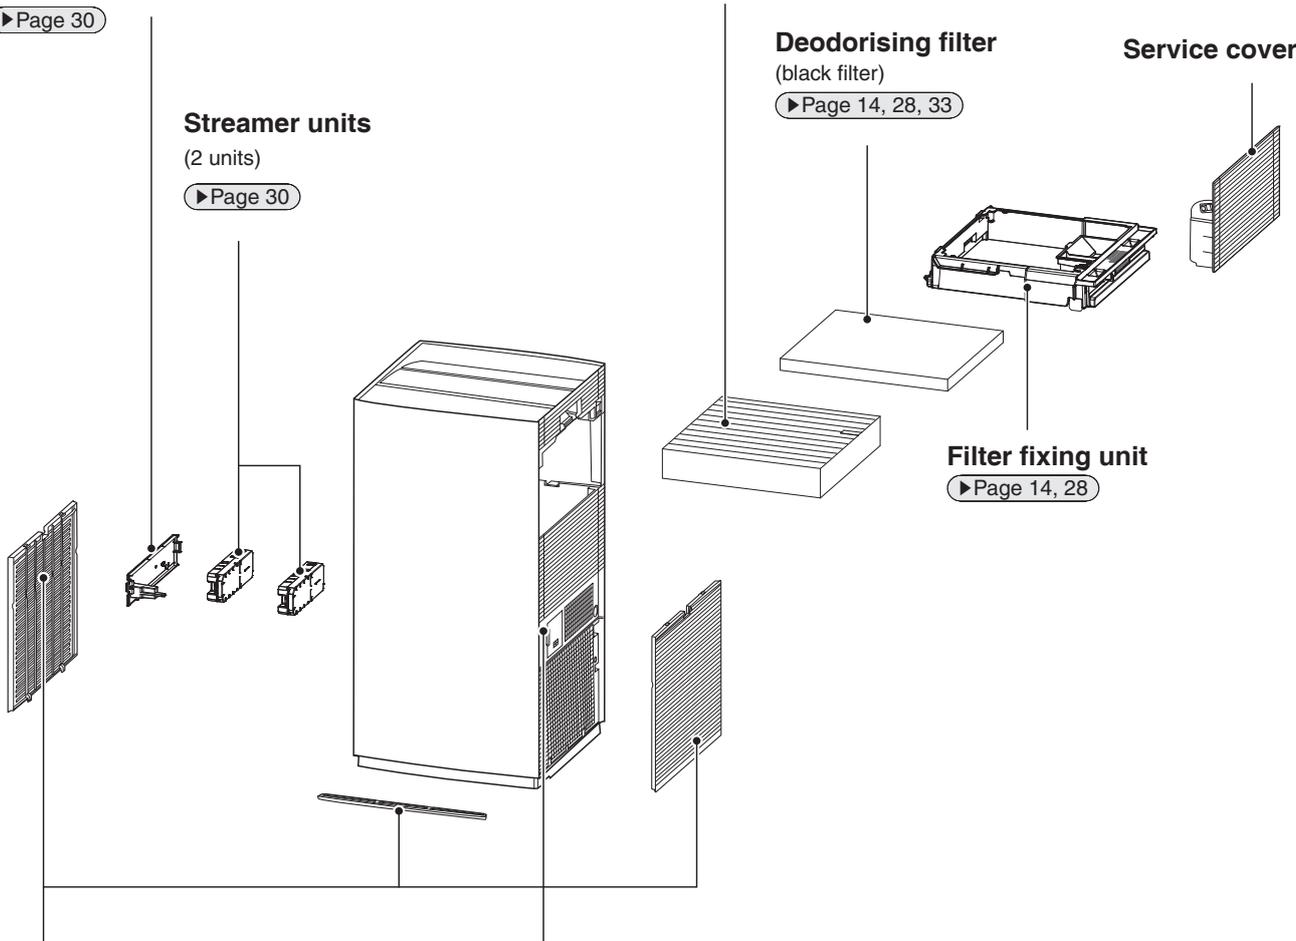

# Names of Parts and Operations

## Operating/Indicator Panel

### Operations and operating status will be notified by tones.

- Operation starts ..... 2 quick beeps
- Settings change ..... 1 short beep
- Operation stops ..... 1 long beep
- When cannot be used ..... 3 shorts beeps
- Notification ..... 3 long beeps

### Streamer lamp [blue]

Lamp lights up depending on Streamer operation condition.

▶Page 21 and 22

If the Streamer lamp blinks. ▶Page 30


### Daikin eye

Displays the condition of the air selected with **AIR MONITOR** in 3 colours: Blue, Orange, Red.

- if "µg/m<sup>3</sup>" is selected  
Lights up in the same colour as the PM2.5 sensor lamp.
- if "°C" is selected  
Lights up in the colours displayed below, according to the current indoor temperature.

Lamp colour	Red	Orange	Blue	Orange	Red
Indoor temperature (°C)	≤ 10	11-17	18-28	29-35	≥ 38

- if "%" is selected  
Lights up in the same colour as the humidity sensor lamp.

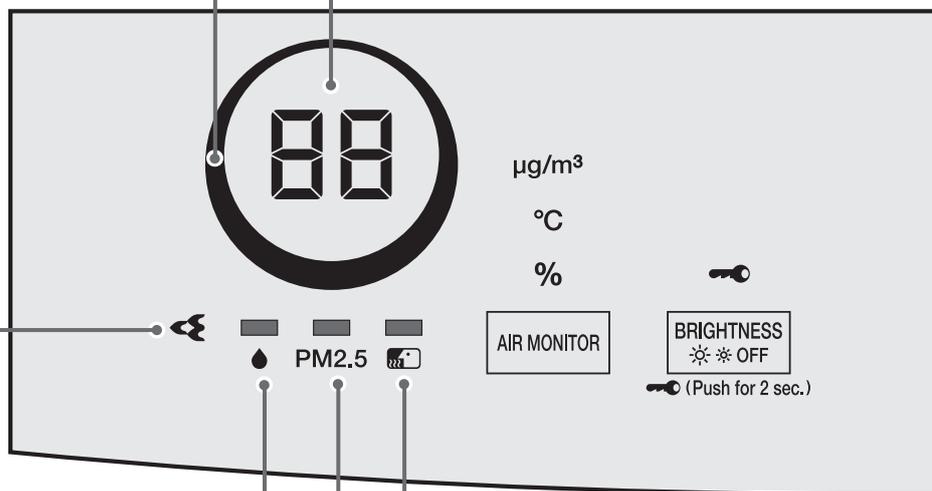

### Humidity sensor lamp

Indicates the level of humidity in 3 colours: Blue, Orange, Red.

Lamp colour	Red	Orange	Blue	Orange	Red
Indoor humidity (%)	0-20	21-29	30-60	61-70	71-100

- After operation is started, the lamp will light blue for about the first 30 seconds regardless of humidity level.

### PM2.5 sensor lamp

Indicates the volume of ambient dust by 3 lamp colours: Blue, Orange, Red

- Blue indicates clean air.

Lamp colour	Blue	Orange	Red
PM2.5 concentration (µg/m <sup>3</sup> )	0-12	13-24	≥ 25

- After operation is started, the lamp will light blue for the first minute (approx.) regardless of volume of dust.

- If the responsiveness of the PM2.5 sensor is poor, change the sensitivity of the sensor. ▶Page 23, 24
- The responsiveness of the PM2.5 sensor may be poor during FAN setting Turbo or when airflow is high in AUTO FAN MODE. The strong airflow causes dust to be drawn into the air inlets before it can be detected by the PM2.5 sensor. This is normal (not malfunction).

#### PM2.5 sensor detection range

Detectable matter
house dust, tobacco smoke, pollen, mite droppings and remains, pet hairs, diesel particulate matter
Sometimes detectable
steam, oil smoke

### AIR MONITOR indicator [white] (estimate values)


- Indicates what setting is selected with AIR MONITOR to display. (Settings at time of purchase :  $\mu\text{g}/\text{m}^3$ )
- $\mu\text{g}/\text{m}^3$  (PM2.5 concentration)  
Displays the concentration of PM2.5 in the room in the range of 0 to 99  $\mu\text{g}/\text{m}^3$ . (Steps of 1  $\mu\text{g}/\text{m}^3$ )  
If the concentration exceeds 99 $\mu\text{g}/\text{m}^3$ , "HI" is displayed.
    - [-] is displayed for about 1 minute immediately after operation start regardless of the PM2.5 concentration.
  - $^{\circ}\text{C}$  (current indoor temperature)  
Displays the current room temperature in the range of 0 $^{\circ}\text{C}$  to 39 $^{\circ}\text{C}$ . (Steps of 1 $^{\circ}\text{C}$ )  
When the temperature is below 0 $^{\circ}\text{C}$ , "0" is displayed. When the temperature is above 39 $^{\circ}\text{C}$ , "39" is displayed.
    - [-] is displayed for about 30 seconds immediately after operation start regardless of the indoor temperature.
  - % (current indoor humidity)  
Displays the room humidity in the range of 20% to 90%. (Steps of 1%)  
When the humidity level is below 20%, "20" is displayed. When the humidity level is above 90%, "90" is displayed.
    - [-] is displayed for about 30 seconds immediately after operation start regardless of the indoor humidity.

**The display on the unit may differ from that of the other hygrometers or thermometers.**

- This is because the humidity, temperature and volume of PM2.5 become uneven even in the same room due to the flow of air. Please use the Air monitor indicator as a rough estimate.

States of the AIR MONITOR indicator and their meanings

[▶Page 32](#)

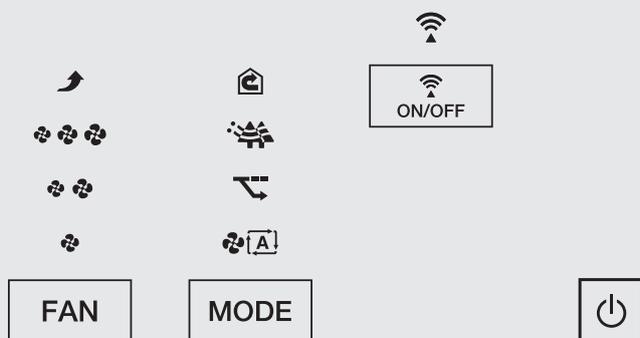

### Odour sensor lamp

Indicates the intensity of odours in 3 colours: Blue, Orange and Red.

- Blue indicates that the air is clean.

Lamp colour Blue Orange Red

Odours 
←
→
Low
High

- After operation is started, the lamp will light blue for the first minute (approx.) regardless of odour level.**
- If odour intensity levels are unchanging, the sensor may not respond even if there is a strong odour in the air.
- The sensor may not respond to some odours such as pet odours (excluding ammonia), garlic odour, etc.

- As odour perception varies by person, in some cases an odour may be sensed even when the lamp is Blue.  
If the odour bothers you, switch to manual airflow rate, and select a high airflow rate. [▶Page 19](#)

The basic sensitivity of the odour sensor will be determined by odour levels in the first minute (approx.) after the power supply plug is inserted. Insert the power supply plug when the air is clean (odour-free).

#### Odour sensor detection range

Detectable matter
tobacco odours, cooking odours, pet odours, toilet smells, waste smells, mould odours, sprays, alcohol
Sometimes detectable
sudden changes in temperature/humidity, steam, oil smoke, gas emitted from combustion-based heating devices

# Names of Parts and Operations

## Operating/Indicator Panel

**AIR MONITOR setting lamps [white]**

Indicate the AIR MONITOR setting.

- $\mu\text{g}/\text{m}^3$  (PM2.5 concentration)
- $^{\circ}\text{C}$  (current indoor temperature)
- % (current indoor humidity)

**Child Proof Lock**


Child Proof Lock is active when **BRIGHTNESS** is pressed for about 2 seconds.  
(Deactivate by pressing **BRIGHTNESS** for 2 seconds)

**Child Proof Lock lamp [white]**

Lamp will be lit when the Child Proof Lock is active. When lamp lights up, operations will be restricted. When buttons are pressed, a tone (3 short beeps) will sound, preventing misoperation by small children.

**Note**

- If the unit is unplugged when Child Proof Lock is active, Child Proof Lock will turn off.

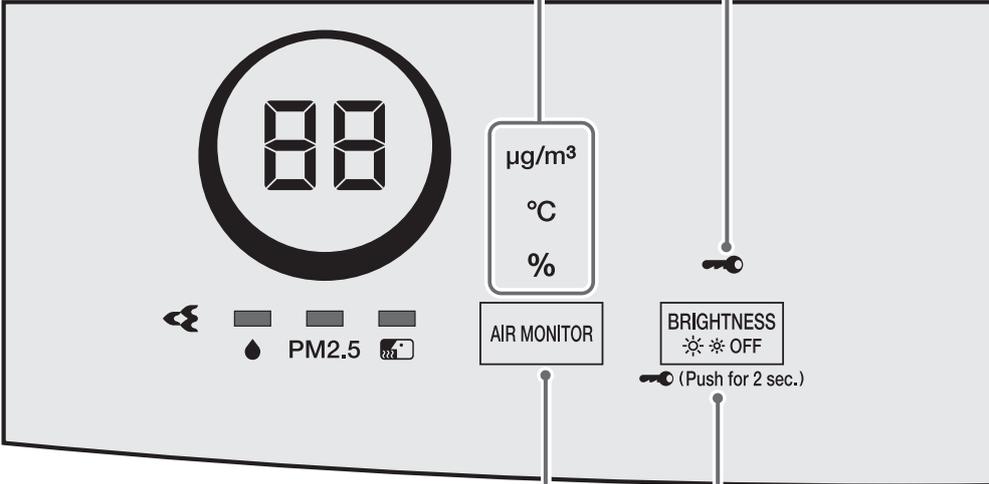

**AIR MONITOR button**

Allows you to change the item you want to monitor in the air. (PM2.5, temperature, or humidity)

**BRIGHTNESS button**

During operation, each press cycles through operating panel lamp brightness levels. Please use if lamp brightness is a concern when sleeping.

• The following lamps do not turn off even though brightness is set to OFF.  
[MODE lamp, FAN lamp, Child Proof Lock lamp, Communication lamp]

BRIGHT → 
 DIM → 
 OFF

**FAN lamps [white]**

Indicates the active FAN setting.  
(4 levels: Quiet, Low, Standard, Turbo)

**MODE lamps [white]**

Indicates the MODE in operation.  
(AUTO FAN, ECONO, ANTI-POLLEN, CIRCULATOR)

**Communication lamp, Communication ON/OFF button**

Used when operating the air purifier via smartphone.


- Each press cycles between communication ON and OFF. The Communication lamp lights up if communication is set to ON.
- Perform connection settings before using. [▶Page 16 - 17](#)



FAN



MODE



**ON/OFF button**

Press to turn the power ON or OFF. [▶Page 18](#)

**MODE button**

Press to select the desired MODE. [▶Page 19, 20](#)

**FAN setting button**

Press to cycle between FAN settings. [▶Page 19](#)

**Regarding Airflow rate Setting Symbol**


**Symbol table**

	Airflow Rate			
Symbol				
Setting	Quiet	Low	Standard	Turbo

# Preparation Before Operation


## 1 Checking Accessories

Attach to the unit before operation.

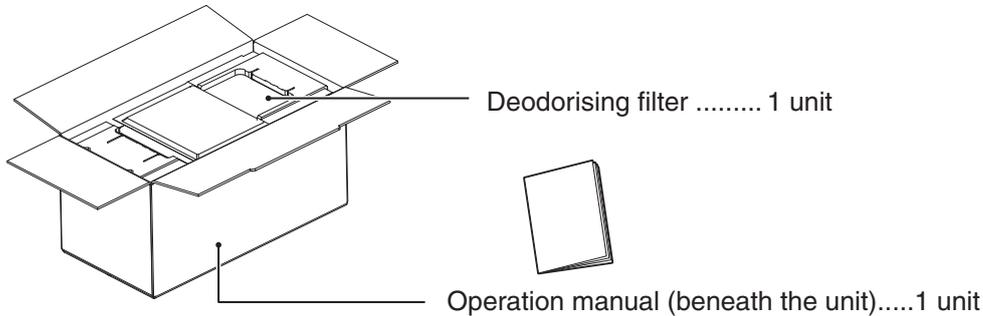

## 2 Positioning The Unit

Before setting up, remove the fixing tape on the bottom which is securing the power supply cord, then take out the power supply cord. Remove the fixing tape on the pre-filter (front) as well.

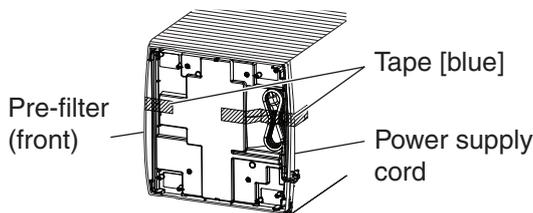


### Pointers for good positioning

- Choose a position from which airflow can reach all areas of the room.
- Place on a stable surface. If the unit is placed on an unstable surface, vibrations from the unit may be amplified.
- If interference from the power circuit inside the unit or cables causes disturbance on your TV screen images or the emission of static noise from nearby radios or stereos, move the unit to at least 2m away from the device. Keep cordless phones and radio-controlled clocks away from the unit also.
- This unit contains radio equipment; the minimum separation distance between the radiating part of the equipment and the user is 30 cm.

### Attention

- To avoid staining of walls, position the unit in accordance with the positioning measurements in the illustration. However, please note that since this unit draws in dirty air, certain types of wall may be stained even if the measurements are adhered to. In such cases, make sure to maintain sufficient distance between the unit and the wall.
- When used for a long period of time in the same location, the floor and surrounding walls may get stained as air is drawn into air inlets near the base of the unit. It is recommended to clean the unit periodically.
- Place the unit on a flat surface.

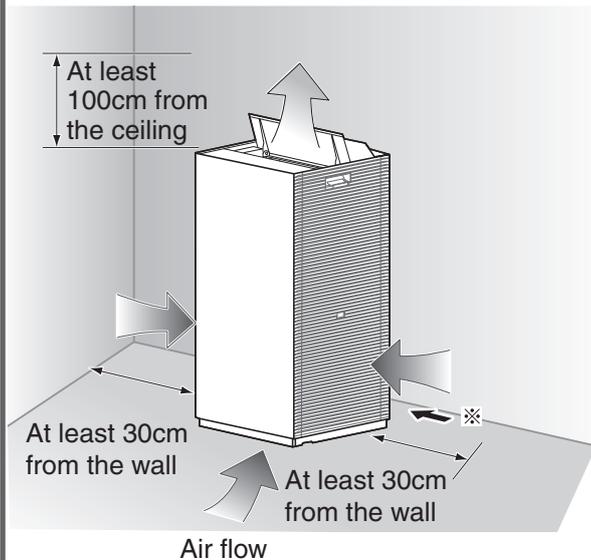


※ Please leave some distance from the wall to ensure power supply cord does not bend forcibly. (risk of damage and overheat)

### 3 Attaching the Deodorising Filter


#### 1. Remove the service cover.

- ① Firmly hold the service cover grip and slowly pull it towards your direction while pressing the lever.

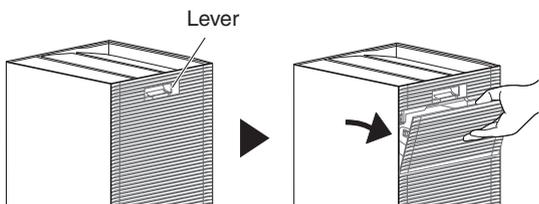


#### 2. Remove filter fixing unit.

- ① Move the fixing switch on filter fixing unit to side to unlock.

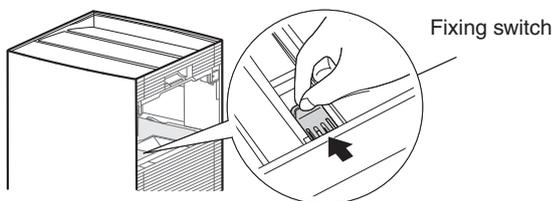

- ② Lift up the grip on the top of the filter fixing unit and pull out towards your direction.

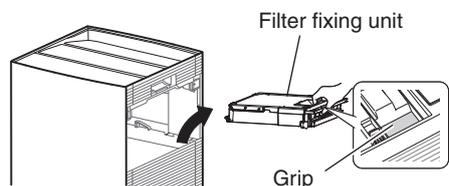


- ③ Remove fixing tape on the filter fixing unit.

#### 3. Remove the deodorising filter from the bag.

- Filter has no front and back.



**Please wear gloves when handling the filter.**  
(To prevent dust from the deodorising filter from making your hand dirty.)



- Observe local waste separation regulations when disposing of the deodorising filter bag and desiccant.

#### 4. Attach the deodorising filter.


Insert the short side of the filter into the main unit above the dust collection filter.

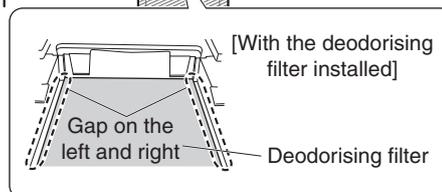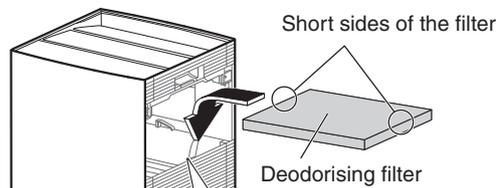

Dust from the deodorising filter may turn the dust collection filter black, but it does not affect dust collection performance.

#### 5. Attach the filter fixing unit.

Attach the filter fixing unit and move the fixing switch to side to lock it.

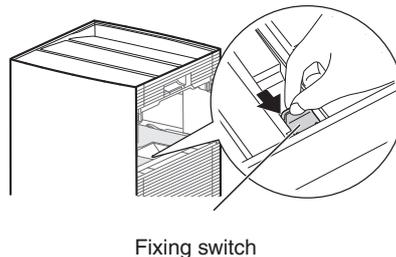


#### Attention

- Make sure to lock the filter fixing unit. If it is unlocked and the unit is operated, performance drop or abnormal noise may occur.

#### 6. Attach the service cover.


- When starting operation, if a notification tone sounds and the odour sensor lamp blinks, the deodorising filter and the filter fixing unit are not properly installed.
- Re-install the deodorising filter and the filter fixing unit.



### 4 Inserting the Power Supply Plug into the Socket

- The basic sensitivity of the odour sensor will be determined by odour levels in the first minute (approx.) after the power supply plug is inserted every time.

**Insert the power supply plug when the air is clean (odour-free).**

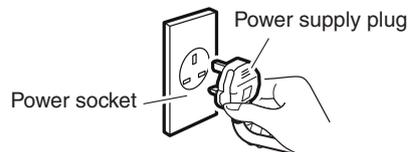

# Operating the air purifier via smartphone

## When you want to operate the air purifier via smartphone

By connecting your smartphone to the air purifier via wireless LAN, you can operate the air purifier from your smartphone via the Internet. (Setting at time of purchase: OFF)

Wireless LAN connection adaptor specifications: Supported standards IEEE802.11b/g/n (2.4GHz only), Channels 1 to 13CH

Use with the following network environments (wireless LAN routers)

Encryption method: WPA-PSK (AES), WPA2-PSK (AES)

IP configuration method: DHCP or a fixed IP address

Communication standard: IPv4

(HTTP proxy is not supported)

## Precautions During Use of Wireless LAN

- **Because wireless LAN uses radio waves to send and receive data, there is a risk of eavesdropping and unauthorized access.**  
When using wireless LAN, be sure to fully understand the dangers, and secure the product's wireless LAN connection adaptor so that others cannot connect to it. This means keeping your wireless LAN router SSID/KEY, app login ID, and password secret from others. [▶Page 8](#)  
If someone who is unauthorized gains access to and operates this product, turn off the wireless LAN connection adaptor using the communication ON/OFF button. [▶Page 12, 17](#)
- **Please be aware in advance that we will not be liable for any damages that arise if you use this product without taking security measures.**
- **Using near other wireless LAN equipment or microwave ovens may affect wireless LAN communication.**
- **This product cannot be directly connected to the communication line of a telecommunications carrier (Internet provider, etc.).**  
When connecting to the Internet, be sure to connect via a router, etc.

## ⚠ WARNING

- If the air purifier is located in a place which may be used by people with cardiac pacemakers, do not turn on the wireless LAN connection adaptor with the communication ON/OFF button.  
(It may affect the operation of pacemakers or other devices, causing trouble.)
- Do not turn on the wireless LAN connection adaptor near people with cardiac pacemakers or defibrillators.  
(If it is too close, radio waves may affect the operation of the pacemaker or other devices)
- Do not turn on the wireless LAN connection adaptor near automatic control devices such as automatic doors.  
(Accidents may result due to device malfunction)

For detailed specifications, installation instructions, setting methods, FAQ, declaration of conformity and the latest version of this manual, visit <http://www.onlinecontroller.daikineurope.com>.

## ℹ INFORMATION

- Daikin Malaysia Sdn. Bhd. declares that the radio equipment type inside of this unit is in compliance with Directive 2014/53/EU.
- This unit is considered as combined equipment according to the definition of Directive 2014/53/EU.

## Basic parameters of Wireless LAN connection adaptor


What	Value
Frequency range	2400 MHz~2483.5 MHz
Radio protocol	IEEE 802.11b/g/n
Radio frequency channel	13ch
Output power	13 dBm
Effective radiated power	15 dBm (11b) / 14 dBm (11g) / 14 dBm (11n)
Power supply	DC 14 V / 100 mA

## Preparation Before Connection

### The customer is responsible for providing:

- Smartphone or tablet with minimum supported version of Android or iOS, specified on app.daikineurope.com.
- Internet line and communication device, such as a modem, router, etc.
- Wireless LAN access point
- Installed free ONECTA app

**Note:** If needed, the SSID (Service Set Identifier) and the KEY (password) are located on the unit.

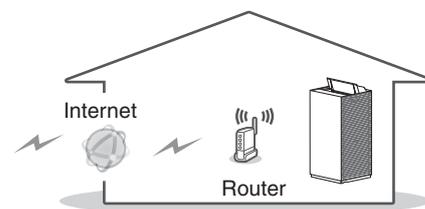

## ! WARNING

When operating the air purifier from outside the home, it is not possible to check the condition of the air purifier, its surroundings, people in the room, etc., so be sure to adequately check the safety in advance before using it. Depending on the circumstances, people may be killed or seriously injured, or property damage may result.

### ■ Check the following in advance (while at home)

- Make sure that the power supply plug is firmly inserted all the way to the base.  
There should be no dust buildup on the power supply plug. (Heating, ignition, and fire may result due to poor contact and defective insulation)
- Make sure that there are no existing schedule timer reservations set by another person.  
(May cause poor physical condition due to unexpected start or stop of operation. May cause adverse effects to plants and animals)
- Make sure there are no problems with the air purifier. Make sure that changes in airflow will not adversely affect people in the room. (Make sure there are no objects that can fly away)  
(Airflow may cause objects to fall, resulting in fire, injury or stains on household items)

### ■ Check the following before and while operating the air purifier from outside the home


- If you know that there are people at home, let them know that you will start or stop operation remotely.  
(If someone is at home standing on a stool or ladder, they may be surprised at the sudden start or stop of operation, and may fall off the stool or ladder. Also, bad physical condition may be caused by sudden changes in the indoor environment)
- Operation of the air purifier can be started and stopped by pressing the buttons on the air purifier itself, even when it is being operated from outside the home.
- Do not operate the air purifier remotely if there are people in the room who cannot operate it by themselves, such as small children, people with disabilities, elderly people, etc.
- Frequently check the settings and operating conditions. Bad physical condition and adverse effects to plants and animals may be caused by sudden changes in the indoor environment. If an error occurs with the air purifier, stop operation immediately and contact the place of purchase. Check again via the operation screen to make sure that operation is stopped.

## Connection settings

### 1 Check if router has WPS built-in

### 2 If router has built-in WPS Connect air purifier to network

- 1 Press  to activate the wireless LAN connection adaptor.
- 2 Press and hold  for about 5 seconds and, once the Communication lamp on the unit flashes orange, press the WPS button\* on the router within 2 minutes.
  - How to operate the WPS button varies by router. For details, refer to the manual supplied with the router.



\* If using an automatic connection function other than WPS, refer to the manual attached to the router when operating the automatic connection button.

### Setting is complete once the Communication lamp on the unit lights green.

- The lamp may light red before turning green, until the connection between the wireless LAN connection adaptor and the router is complete, depending on the communication environment; however, this is not a malfunction.

If the Communication lamp on the unit lights orange, repeat steps ① to ②.

If connection continues to fail, follow the steps in

**If router does not have built-in WPS** [▶Page 17](#)


- 3 Connect your smartphone and router via Wi-Fi.
  - Open "Wi-Fi" in settings on the smartphone to check that your smartphone is connected to the SSID of the router in use.
- 4 Launch the app and establish settings.
  - Open the installed app "ONECTA" and operate in accordance with the on-screen guidance.
- 5 Operate the air purifier.
  - You can now operate the air purifier using your smartphone at home or on the go.

# Operating the air purifier via smartphone

## 2 If router does not have built-in WPS Connect the Air Purifier to the Network

Follow the steps below even if you are choosing to not use WPS.

- ① Press  to activate the wireless LAN connection adaptor.
- ② Launch the app and follow the guidance to connect the air purifier and router.
  - SSID and KEY are required for connection.  
(A sticker with the SSID and KEY can be found in the location shown in the illustration on the right.)




Location of SSID and KEY

For detailed specifications, installation instructions, setting methods, FAQ, declaration of conformity and the latest version of this manual, visit [app.daikineurope.com](http://app.daikineurope.com).



### Communication lamp status

Lights up or blinks according to the wireless LAN communication status, as shown below.



Lit up	Green	Wireless LAN connection adaptor is connecting to router
	Orange	<ul style="list-style-type: none"> <li>• Wireless LAN connection adaptor and router connection not set</li> <li>• Wireless LAN connection adaptor is connecting to router (immediately after turning communication ON)</li> </ul>
	Red	Wireless LAN connection adaptor cannot connect to the Internet
Unlit		Wireless LAN connection adaptor function is OFF

### If the unit (air purifier) can't be found with the app

- Perform connection settings again.
- Move the router closer to the air purifier.

### If you want to turn the wireless LAN connection adaptor function OFF

Press the  . ■ If you want to turn the adaptor function "ON", press  again.

### If necessary If you want to reset the wireless LAN connection adaptor to factory default settings

- If you want to redo the settings, etc., the wireless LAN connection adaptor can be reset to the factory default settings from the time of purchase.  
If you reset to factory default settings, network settings will be erased, as well as historical data such as the number of sensor responses.
- If disposing of the unit or transferring it to a new user, reset it to factory default settings in order to erase the internal data.

- ① Press  to turn on the Communication lamp.
- ② Press and hold  and  at the same time for about 5 seconds while the unit is stopped.
  - A short beep sounds, and the Communication lamp [orange] and the AUTO FAN MODE lamp [white] blink for about 20 seconds.
  - When reset to factory default settings is completed, a long beep sounds and all lamps turn off.
  - If, after step ②, the Communication lamp lights up and only the AUTO FAN MODE lamp turns off, repeat steps ① and ②.

# Operation

## ⚠ WARNING

Do not turn off the unit by unplugging it from the power socket.  
(Fire due to overheating or electric shock may result)



Open the louvres manually before operation.  
(After operation is stopped, louvres are not closed automatically because it is hand-operated)

**If you want to change airflow direction**  
Adjust the louvres to your desired position.  
Louvres can be adjusted to 4 positions.

## Using the Air Purifying Operation (turning operation ON/OFF)

**Cleans the air in the room.**

Press

- Press again to turn OFF.

### Attention

Do not move the unit, or attach or remove parts to/from the unit while it is in operation. Breakage or malfunctioning may result.


### Note

- At the time of purchase, the unit is set to Air Purifying Operation, AUTO FAN MODE.
- When the unit is unplugged or turned OFF, it will operate with the settings last used the next time it is turned ON.
- Operation settings cannot be changed for about 2 seconds immediately after the power supply plug is inserted.

**Warning**

Do not turn off the unit by removing the power supply plug during operation. (Fire due to overheating or electric shock may result)  
Do not operate with deodorising filter unit, dust collection filter and other components removed. (breakage or malfunction may result)

# Operation

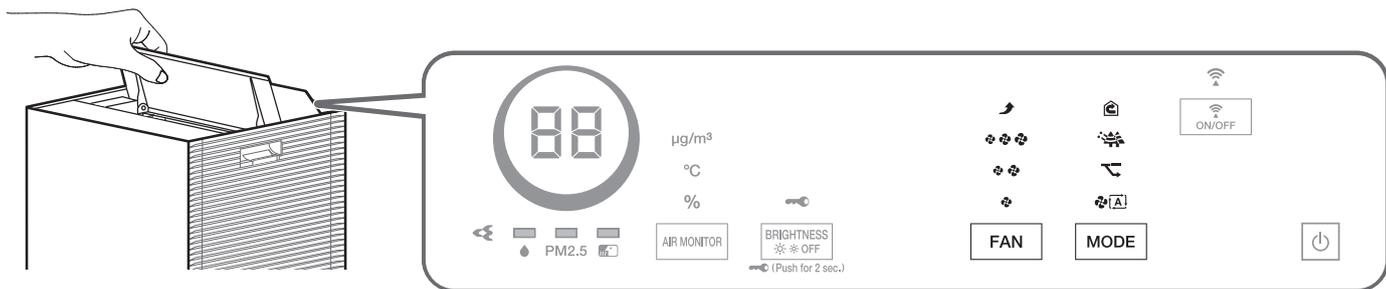

## Changing the Airflow Rate

Select the desired FAN setting.

Press **FAN**



- Each press cycles between the FAN lamps [white].

### About FAN settings

**Quiet**

A gentle breeze is emitted. Recommended to use this during sleep hours. To quickly eliminate odours from a room, it is recommended that the FAN setting be set to Standard or above otherwise deodorising capacity is reduced.

**Turbo**

The ambient air is quickly purified using a large airflow. Recommended for use while you are cleaning up a room.

## Operating MODEs

Select a MODE specific to your needs. Airflow is adjusted automatically when the unit is running in a MODE.

Press **MODE** during operation.

- Each press cycles between the MODE lamps [white]



MODE	Usage and Function
<p><b>AUTO FAN</b></p>	<p><b>Automatic airflow rate adjustment</b></p> <p>FAN setting (Quiet, Low, Standard, High) is automatically adjusted according to the degree of air impurity.  <b>Purifying capacity increases as airflow rate rises.</b>  <b>If operating sound is a concern, airflow rate can be changed.</b> <a href="#">▶Page 25, 26</a></p> <p>※ Maximum airflow rate during AUTO FAN MODE is High, which is lower than Turbo.</p> <ul style="list-style-type: none"> <li>Degree of air impurity corresponds to the volume of dust and the intensity of the odours in the ambient air.</li> </ul>
<p><b>ECONO</b></p>	<p><b>Saving energy</b></p> <p>In power saving mode within ECONO MODE, the FAN setting automatically switches between Quiet and Low only. Power consumption (*1) and operating sounds are minimised.  <b>If the air is clean, after about 5 minutes, Monitoring mode automatically activates.</b>  <b>Recommended for use during sleep hours.</b></p> <p>※1 By comparison to AUTO FAN MODE (approx. 20.8Wh), power consumption in ECONO MODE (approx. 10.1Wh) is approx. 10.7Wh lower.          Test condition case in Malaysia: Operation in 12.4m<sup>2</sup> room over 1 hour. Assuming 1 cigarette was smoked immediately after the unit was turned on.</p> <div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div data-bbox="343 1025 651 1279" style="border: 1px solid black; padding: 5px; width: 30%;"> <p><b>Power saving mode</b></p> <p>FAN setting switches automatically with an airflow rate of Quiet or Low.</p> </div> <div data-bbox="683 1048 922 1272" style="text-align: center; width: 30%;"> <p>If the air is clean, after about 5 minutes...</p>  <p>If dust or odours are detected...</p> </div> <div data-bbox="957 1032 1449 1285" style="border: 1px solid black; padding: 5px; width: 30%;"> <p><b>Monitoring mode</b></p> <ul style="list-style-type: none"> <li>The fan starts and stops periodically. Dust and odours are monitored.</li> <li>The following functions are turned OFF to further reduce power consumption.</li> </ul> <p><b>Streamer</b> <input type="checkbox"/> OFF</p> <p><b>Active Plasma Ion</b> <input type="checkbox"/> OFF</p> </div> </div> <p>• As the FAN setting is limited to Quiet and Low, air purifying capacity is reduced.</p> <p>• Since the air in the room is not drawn in while the fan is stopped, the sensitivity of the PM2.5 sensor and odour sensor will decrease. To prevent this reduction in sensitivity, turn Monitoring mode OFF.</p> <p><a href="#">▶Page 25, 26</a></p>
<p><b>ANTI-POLLEN</b></p>	<p><b>Reducing pollen levels</b></p> <p>A gentle air current is created by switching between the FAN setting between Standard and Low every 5 minutes so that pollen can be drawn in and caught before it reaches the floor.</p>
<p><b>CIRCULATOR</b></p>	<p><b>When you want to circulate the air in the room</b></p> <p>The air in the room is kept clean and local variations in temperature are suppressed. It is even more effective if the unit is installed opposite an air conditioner.  <b>The airflow rate is High for about 30 minutes after operation start, in order to circulate the air in the room.</b>  <b>After that, temperature change around the unit is monitored and FAN setting is automatically adjusted.</b></p> <p>(There is no temperature adjustment function)</p> <ul style="list-style-type: none"> <li>If the indoor temperature is low, FAN setting may not be set to High.              (To reduce chills caused by airflow)</li> </ul>


# Changing the setting

Function	1	
<p><b>Streamer output settings (Normal/Low)</b></p> <p>Setting at time of purchase: Normal</p> <p><b>If the hissing sound generated by Streamer discharge or the smell of ozone bothers you, set it to Low.</b></p> <ul style="list-style-type: none"> <li>It is recommended that the Streamer output be set to Normal as deodorising capacity is reduced when set to Low</li> </ul>	<p>Can be performed either during operation or while operation is stopped.</p> <p>Press  for about 5 seconds and when a short beep sounds, press  while continuing to hold down .</p> <p>Release both  and  when a short beep sounds.</p>	<p>ANTI-POLLEN MODE lamp will light up after blinking.</p> <div style="text-align: center;">  <p>Blinking → Lit up</p> </div> <p>According to the current setting, the FAN lamp will turn from blinking to lit up.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Normal</p> </div> <div style="text-align: center;">  <p>Low</p> </div> </div>

2

Press  to change the setting\*

Each press cycles between Normal and Low.



■ Streamer operation condition

FAN/MODE setting		Streamer output setting	
		Normal	Low
FAN	Turbo	ON	
	Standard	ON-OFF*	
	Quiet, Low	ON-OFF*	OFF
MODE	AUTO FAN, ANTI-POLLEN, CIRCULATOR	ON-OFF*	
	ECONO	ON-OFF*	OFF

\* The Streamer operation status ON-OFF means that the Streamer turns ON and OFF automatically depending on the degree of air impurity and FAN setting.

**About the Streamer lamp**

When the setting condition of Streamer is ON-OFF or ON, it is always lit up. (However, it is unlit during Monitoring mode).

It is unlit when the setting condition of Streamer is OFF.


3

Press  OFF

A short beep sounds with the ANTI-POLLEN MODE lamp blinking while the FAN lamp blinks according to the new setting.




Blinking



4

While the lamp is blinking, unplug the power supply plug, wait at least 5 seconds, and then insert the power supply plug again. Setting is now complete.

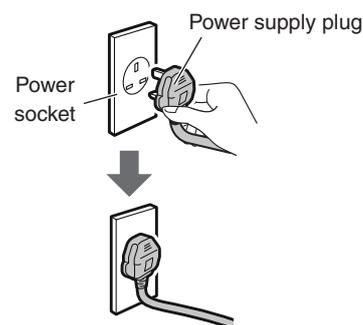

- If this procedure is not performed, the unit will not return to the regular operation mode.
- Settings are remembered even if the unit is unplugged.

\* If the lamps do not change even after the settings were changed, unplug the unit, wait at least 5 seconds, then re-insert the power supply plug and repeat the above procedure from the beginning.


# Changing the setting

Function	1	
<p><b>Active Plasma Ion output (ON/OFF)</b></p> <p>Setting at time of purchase: ON</p> <p><b>If the odour of ozone bothers you, set Active Plasma Ion output to OFF.</b></p> <ul style="list-style-type: none"> <li>• If turned off, Active Plasma Ion is not discharged but dust and odour can be removed.</li> <li>• If the odour of ozone continues to bother you even after output has been set to OFF, set Streamer output to Low.</li> </ul>	<p>Can be performed either during operation or while operation is stopped.</p> <p><b>Hold down  for about 5 seconds and when a short beep sounds, press  while continuing to hold down .</b></p> <p><b>Release both  and  when a short beep sounds.</b></p>	<p>CIRCULATOR MODE lamp will light up after blinking.</p> <div style="text-align: center;">  <p>Blinking → Lit up</p> </div> <p>According to the current setting, the FAN lamp will turn from blinking to lit up.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Normal</p> </div> <div style="text-align: center;">  <p>Low</p> </div> </div>
<p><b>PM2.5 sensor sensitivity (Low/Normal/High)</b></p> <p>Setting at time of purchase: Normal</p> <p><b>PM2.5 sensor sensitivity can be set to Low, Normal, High.</b></p> <ul style="list-style-type: none"> <li>• Low means sensor is less responsive and High means the sensor is more responsive.</li> </ul>	<p>Can be performed either during operation or while operation is stopped.</p> <p><b>Press  for about 5 seconds and when a short beep sounds, press  while continuing to hold down .</b></p> <p><b>Release both  and  when a short beep sounds.</b></p>	<p>A short beep sounds and the FAN lamp will turn from blinking to lit up according to the current setting.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Low</p> </div> <div style="text-align: center;">  <p>Normal</p> </div> <div style="text-align: center;">  <p>High</p> </div> </div>

2

Press  to change the setting\*

Each press cycles between ON and OFF.




3

Press 

A short beep sounds with the CIRCULATOR MODE lamp blinks while the FAN lamp blinks according to the new setting.




Blinking



4


While the lamp is blinking, unplug the power supply plug, wait at least 5 seconds, and then insert the power supply plug again. Setting is now complete.

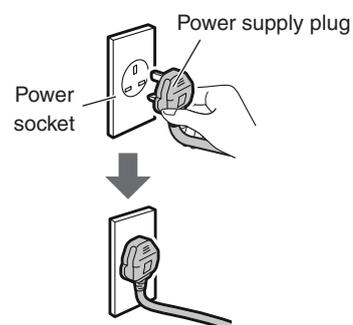

- If this procedure is not performed, the unit will not return to the regular operation mode.
- Settings are remembered even if the unit is unplugged.


Press  to change the setting\*

Each press cycles between Low, Normal, High.

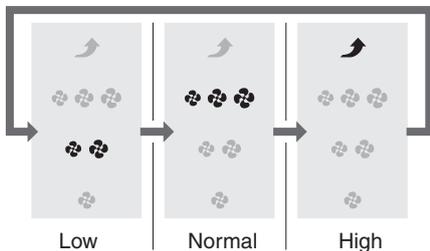

Press 

A short beep sounds and the FAN lamp blinks according to the new setting.

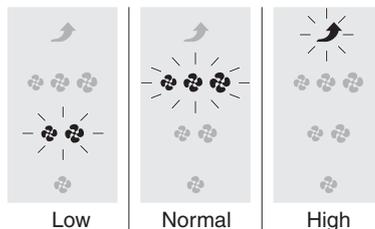


\* If the lamps do not change even after the settings were changed, unplug the unit, wait at least 5 seconds, then re-insert the power supply plug and repeat the above procedure from the beginning.

# Changing the setting

Function	1	
<p><b>Monitoring mode within AUTO Operation and ECONO MODE (ON/OFF)</b></p> <p>Setting at the time of purchase: ON</p> <p>The sensitivity of the sensors decrease while the fan is stopped during Monitoring mode. If you do not want the sensitivity of the sensors to be decreased, set to OFF.</p> <ul style="list-style-type: none"> <li>When set to OFF, Monitoring mode will not be performed.</li> </ul>	<p>Can be performed either during operation or while operation is stopped.</p> <p>Press  for about 5 seconds and when a short beep sounds, press  while continuing to hold down .</p> <p>Release both  and  when a short beep sounds.</p>	<p>The FAN lamp (Quiet) blinks, then lights up.</p>  <p>Blinking → Lit up</p> <p>According to the current setting, the ECONO MODE lamp will be displayed as follows.</p>   <p>Blinking → Lit up ON      Unlit OFF</p>
<p><b>Airflow rate range for AUTO FAN MODE (4 Levels/3 Levels)</b></p> <p>Setting at the time of purchase: 4 Levels</p> <p>If operating sound is a concern during AUTO FAN MODE, switch from 4 Levels to 3 Levels.</p> <ul style="list-style-type: none"> <li>Airflow rate range                     <ul style="list-style-type: none"> <li>4 Levels: Quiet, Low, Standard, High</li> <li>3 Levels: Quiet, Low, Standard</li> </ul> </li> </ul>	<p>Can be performed either during operation or while operation is stopped.</p> <p>Press  for about 5 seconds and when a short beep sounds, press  while continuing to hold down . Release both  and  when a short beep sounds.</p>	<p>AUTO FAN MODE lamp will light up after blinking.</p>  <p>Blinking → Lit up</p> <p>FAN lamp (Standard) will display the current setting.</p>   <p>Unlit 4 Levels      Blinking → Lit up 3 Levels</p>

2

Press  to change the setting\*  
Each press cycles between ON and OFF.




3

Press 

A short beep sounds, the FAN lamp (Quiet) blinks, and the ECONO MODE lamp changes to the following display according to the setting.




Blinking



4


While the lamp is blinking, unplug the power supply plug, wait at least 5 seconds, and then insert the power supply plug again. Setting is now complete.

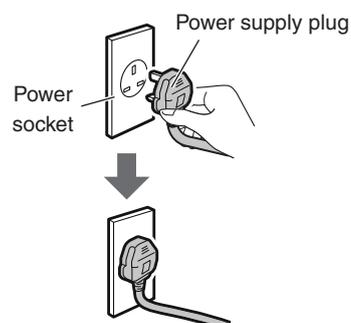

- If this procedure is not performed, the unit will not return to the regular operation mode.
- Settings are remembered even if the unit is unplugged.

Press  to change the setting\*

The airflow rate switches between 4 Levels and 3 Levels with each press.




Press 

A short beep sounds, AUTO FAN MODE lamp blinks, and the FAN lamp changes as below according to the new setting.



Blinking



Unlit 4 Levels

Lit up 3 Levels

\* If the lamps do not change even after the settings were changed, unplug the unit, wait at least 5 seconds, then re-insert the power supply plug and repeat the above procedure from the beginning.

Before cleaning and maintenance work, be sure to unplug the unit. (An electric shock or injury may result)

# Maintenance

## Quick Guide for Maintenance


Please refer to respective page for the method to install or remove each part during maintenance.

### Unit

#### When dirt becomes an issue

##### Wipe

- Wipe up dirt with a soft damp cloth.
- If dirt buildup is severe, wet a cloth with kitchen-use neutral detergent and wipe up the dirt.
- Do not use a hard brush, etc. (Damage may result)

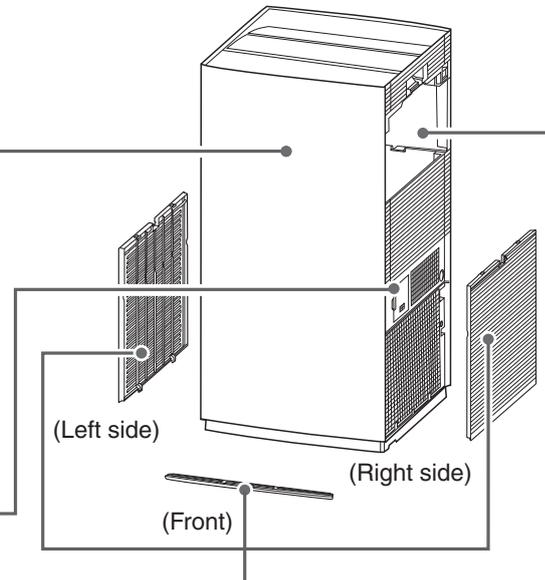

### PM2.5 Sensor

#### When dust builds up


##### Vacuum clean

- ① Remove the pre-filter (right side).
- ② Vacuum off any dust using a vacuum cleaner crevice tool or similar.


#### About every 3 months Wipe

- ① Remove pre-filter (right side) and the cover of the air intake for the sensor.

- ② Remove the hook and pull towards you.



Air intake for sensor



- ③ Lens (2 places)


- Vacuum off any dust around the area using a vacuum cleaner crevice tool or similar.
- Clean the lenses with a wet baby cotton bud softly and then remove the water with a **dry baby cotton bud**.
- Do not use alcohol for cleaning.
- ④ After cleaning, be sure to attach the cover securely. (Malfunction may result)

### Pre-filter (Front / Left side / Right side)

#### About every 2 weeks

##### Vacuum clean

##### Wash with water

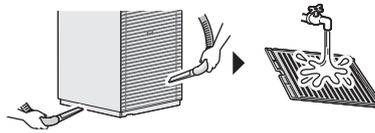


- After removing any dust using a vacuum cleaner, remove and wash the filter with water, then dry thoroughly in the shade.
- Use a soft brush to clean the spaces between the grids.

#### Attention

- **Do not use a cotton bud or hard scrubbing brush.** (Partial damage to the filter may result)
- **Do not apply too much force.** (Partial damage to the filter and scratching may result)
- If dirt buildup is severe, leave the part soaking in lukewarm or room temperature water mixed with kitchen-use neutral detergent, then thoroughly rinse so that no detergent remains and leave in the shade until completely dry.

#### Method to remove


- Hold the indentation of the pre-filter and pull it towards you to remove it.



- ① Place your finger on the top centre side of the pre-filter and push down to remove the hook.
- ② Pull it towards you to remove.




#### Method to attach

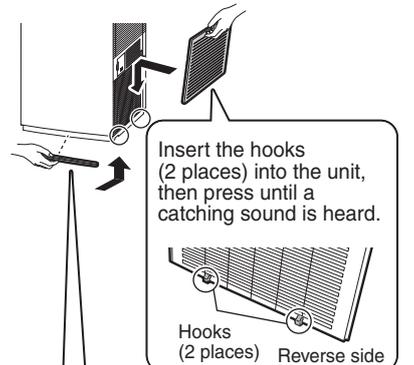

Insert the hooks (2 places) into the unit, then press until a catching sound is heard.

Hooks (2 places) Reverse side


Push all the way and insert the centre hook upward to attach into the unit.



Hook Top view

**! WARNING**


- Do not use gasoline, benzene, thinner, polishing compound, paraffin, alcohol, etc. (Cracking, electric shock, and ignition of fire may result)
- Do not wash the unit with water. (Electric shock and fire or malfunctioning may result)

**Filter Fixing Unit** ▶Page 14

When dirt becomes an issue

**Vacuum clean**

- Remove, then vacuum away dust using a vacuum cleaner.

**Deodorising Filter** For method to attach/remove, refer ▶Page 14

When dirt becomes an issue



**Vacuum clean****Cannot be washed with water**

- Remove the deodorising filter from the unit, then vacuum away dust using a vacuum cleaner.
- If odour becomes an issue, leave the part in a shaded area exposed to the breeze. (approx. 1 day)
- Do not rub the surface.
- Do not wash with water. (If you wash it with water, the filter will lose its shape and can no longer be used)

When odour becomes an issue

**Leave in a breezy, shaded area**


Sometimes, the surface looks white but there is no issue for deodorising performance and operation. Wear gloves to prevent dust from the deodorising filter making your hands dirty.

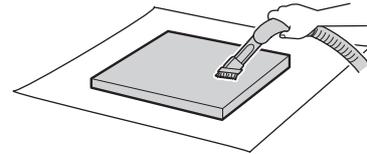**Dust Collection Filter** For method to attach / remove, refer to ▶Page 29

When dirt becomes an issue

**Vacuum clean****Cannot be washed with water**

If you lay down newspaper etc., the surroundings will not get dirty

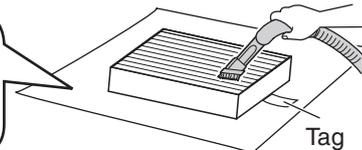

- Lightly vacuum the dust on the surface that doesn't have the tag. Be careful as the filter is easily damaged

**In case filter is damaged or holes are opened on the surface, dust collecting performance decreases because dust passes through filter.**

About every 10 years

**Replace**

▶Page 29

**Attention**

- Make sure that the dust collection filter, deodorising filter and filter fixing unit are attached to the unit when the unit is operating. If these parts are not attached when the unit is operated, breakage/malfunctioning may result.
- Follow the advice below to prevent discolouration or deformation.
  - If detergent was used, be sure to wipe it up thoroughly so none remains.
  - If hot water is used, make sure that it is 40°C or less.
  - Do not leave parts to dry in direct sunlight.
  - Do not dry parts using a hairdryer.
  - Do not expose to fire.
- When using a vacuum cleaner, make sure to not apply force to or knock the part. (Damage may result)
- Do not spray deodorants etc on unit and do not use sprays near the unit. (May cause malfunction)
- This air purifier is a product that collects dust and odour substances of the entire room. If the unit is used in an environment with strong odours such as cigarette smoke, cosmetics or pharmaceuticals, odours will attach on the filter and for a few months or few weeks, odours may be re-emitted. It is recommended to use the unit together with room ventilation for environments with strong odours. (odour takes a longer time to be eliminated compared to dust)

Before cleaning and maintenance work, be sure to unplug the unit. (An electric shock or injury may result)

# Maintenance

## Dust Collection Filter Replace

### Attention

Be sure to operate with the dust collection filter, deodorising filter and filter fixing unit attached. If the unit is operated without the filters attached, malfunction may result.

### Replace in about 10 years

#### Replacement period

- Replacement timing depends on usage patterns and the location of the unit.
- Standard replacement time is about 10 years assuming that the unit is used daily in a home where 5 cigarettes are smoked a day. (calculation in accordance with testing method of Japan Electrical Manufacturers' Association JEM1467 standard)
- If the impurity content of the ambient air is high, the filter will need more frequent replacement.
- Replace the dust collection filter if the filter is failing to perform.

#### Purchase and disposal


- Please refer to [Separately Sold Parts].  
▶Page 39

**1. Remove the service cover.** ▶Page 14

**2. Remove the filter fixing unit.** ▶Page 14


**3. Remove the deodorising filter.**

Hold the side of the filter to remove.

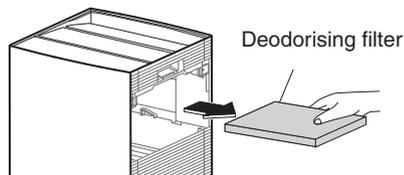


**4. Remove the dust collection filter.**

① Pull the filter tag upwards.




② Hold the bottom part of dust collection filter and lift it out.

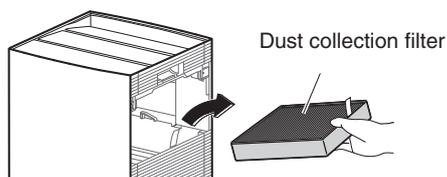

**5. Attach the new dust collection filter.**

- Pay attention to the orientation while installing a new dust collection filter.

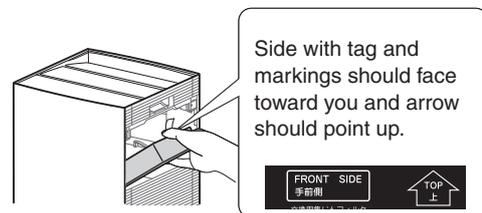


**6. Attach the deodorising filter.** ▶Page 14

**7. Attach the filter fixing unit.** ▶Page 14

**8. Attach the service cover.** ▶Page 14

**Streamer Unit** **Replace** **Do not soak or wash**



**If the Streamer lamp blinks**

**Replacement timing**

Estimated lifespan is about 10 years in the case where unit is operated for 24 hours everyday using AUTO FAN MODE at a house where 5 cigarettes are burned everyday. However, depending on the location where the unit is used (places where oils are present, or dust and humidity is abundant, or sprays and chemical agents are used, etc.), replacement timing may become shorter.


▶Page 3-6

Both units must be replaced simultaneously  
Contact the place of purchase.


**1. Remove the pre-filter on the left side viewing from the front of the main unit.** ▶Page 27

**2. Remove the Streamer unit cover.**

Place your finger on the hook and pull it towards you.




Streamer unit cover (black)




Left side view of the unit

**3. Remove the Streamer units.**

① Remove both Streamer units.



② Remove the connectors of the Streamer units.

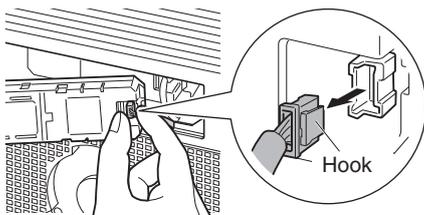


1. Push the hook on the connector.
2. Pull it out while pushing the hook.  
The lock will not release unless the hook is pushed.  
(Breakage may result from forcibly pulling)

**4. Attach the new Streamer units.**


① Pay attention to the direction of the hook on the connector, make sure it is facing to the right, and fully insert the connector.

The connectors need not be inserted in any particular order.



② Attach both Streamer units.

Match the Streamer unit holes to the protrusions.



1st unit (Back)

2nd unit (Front)

**5. Attach the Streamer unit cover.**



Push until you hear a catching sound.

Secure the hooks (2 locations) on the left side of the Streamer unit cover.



- Ensure you don't pinch the connector cord.
- If the Streamer unit cover is not properly attached, the safety switch will engage, and the unit cannot operate.

**6. Attach the pre-filter.** ▶Page 27

**7. Insert the power supply plug while pressing **FAN** on the unit, and wait until a short beep sounds.**

- The Streamer lamp will turn off.
- If you release **FAN** and attempt operation before the short beep sounds, the Streamer lamp will blink again.
- If you perform this step and the Streamer lamp still blinks, please check that the connector is properly inserted.

**— ⚠ WARNING —**

Make sure to stop operation and unplug the power supply plug before maintenance. (May cause electric shock or injury)


# Maintenance

## When Not Using the Unit for a Prolonged Period

- 1. Unplug the power supply.**
- 2. Clean the parts.** ▶Page 28, 29
  - In particular, parts cleaned with water should be completely dry. (Mould may result from remaining moisture)
- 3. Cover the air outlet and other openings with a plastic bag or similar to prevent dust entry, and store the unit upright in a dry place.**  
(Malfunction/breakage may result from storing the unit upside down or horizontally)

# State of the AIR MONITOR indicator and Their Meanings

In case the AIR MONITOR indicator blinks and an error code appears, unplug the power supply plug, wait at least 5 seconds, then insert the power supply plug again and operate the unit. If an error code still appears, please refer to the procedures below:

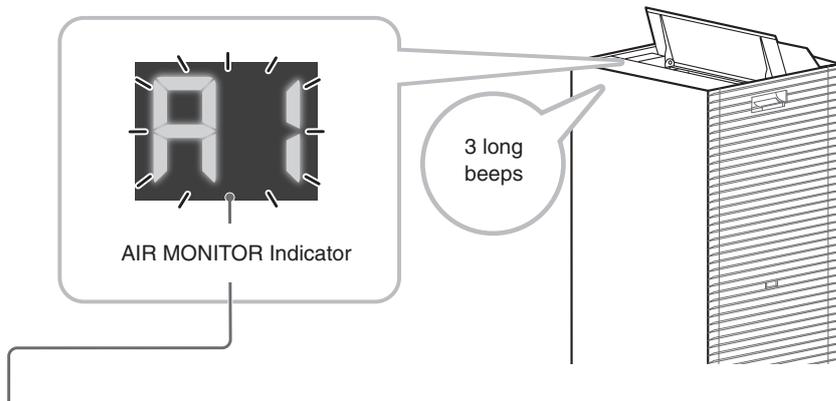


Error Code	Cause	Solution	
AH	Electrical parts are faulty.	Contact the place of purchase	
AI	Electrical parts are malfunctioning.		
E9	Temperature sensor is faulty.		
EE	Humidity sensor is faulty.		
A6	Are the pre-filters, dust collection filter attached? These lamps may blink if the unit is operated without a part attached.	<p><b>If all parts are attached</b> Electrical parts are faulty.</p> <p><b>If one or more parts are not attached</b></p> <p>Unplug the power supply plug, reattach the parts, and then restart operation.</p>	
	Is there a buildup of dust on the pre-filters?	<p><b>If there is no buildup of dust</b> Electrical parts are faulty.</p> <p><b>If there is a buildup of dust</b></p> <p>Unplug the power supply plug, clean the pre-filter, and then restart operation.</p> <p>▶ Page 27</p>	
	Is the air outlet blocked?	<p><b>If the air outlet is not blocked</b> Electrical parts are faulty.</p> <p><b>If the air outlet is blocked</b></p> <p>Remove any obstacles blocking the air outlet, and then restart operation.</p>	

# FAQs

Please check the following before contacting the place of purchase.

**Q: The value displayed as the PM2.5 concentration is always low and seems unresponsive, or the sensitivity of the PM2.5 sensor seems to be poor...**


**A:** Perform periodic cleaning of the PM2.5 sensor as dirt on its lens can lead to poor sensitivity. [▶Page 27](#)  
 In addition, the response time of the PM2.5 sensor depends on the room size. Make adjustments in accordance with the procedure for setting PM2.5 sensor sensitivity. [▶Page 23, 24](#)  
 The responsiveness of the PM2.5 sensor may be poor during FAN setting Turbo or when airflow is High in AUTO FAN MODE.  
 The strong airflow causes dust to be drawn into the air inlet before it can be detected by the PM2.5 sensor. This is normal (not a malfunction).



PM2.5 sensor

**Q: Can the dust collection filter be cleaned with water?**

**A: No. Do not attempt to clean it with water.**  
 (Reduced performance of the dust collection filter may result)  
 Replace it or vacuum away dust with a vacuum cleaner if dirt buildup is severe. [▶Page 28, 29](#)  
 In some cases, odour is stuck to the dust collection filter depending on the location where the unit is used. If the odour becomes severe, replace the filter, or vacuum away dust with a vacuum cleaner. [▶Page 28, 29](#)




**Q: Dust collection filter easily turns black...**

**A:** The blackening does not affect dust collection performance. However, it can be replaced if it is an issue. [▶Page 29](#)

**Can the deodorising filter be cleaned with water? Or should it be replaced?**

**A: It cannot be cleaned with water.**  
 (If water is used, the part will lose its shape and become unusable)  
 If you have inadvertently washed it with water, contact the place of purchase. Remove the deodorising filter from the unit and vacuum off dust with a vacuum cleaner.  
 It is not necessary to replace the filter.  
 In some cases, odour is stuck to the deodorising filter depending on the location where the unit is used.  
**If odour becomes an issue, leave the part in a shaded, breezy area. (approx. 1 day)** [▶Page 28](#)



**Q: Is continuous operation possible?**

**A:** It can be operated continuously. Stop operation regularly and clean it.

# Troubleshooting

■ **Before making an inquiry or a request for repair, please check the following.**

If the problem persists, contact the place of purchase.

■ **In the event of malfunction during operation**

If the indicator lamps light up, or become inoperable, due to a lightning strike etc., remove the power supply plug, wait at least 5 seconds then re-insert the power supply plug and turn the unit ON again.



**Not a problem**

This case is not a problem.



**Check**

Please check again before requesting repairs.

■ **Unit does not respond**

Phenomenon	Check points
Unit will not operate	<ul style="list-style-type: none"> <li>• <b>Is the Streamer unit cover attached?</b> If it is not attached, the safety switch will engage, and the unit cannot operate. → Install the Streamer unit cover properly and attempt operation again. (▶Page 30)</li> </ul>

■ **Sounds can be heard**

Phenomenon	Check points
Hissing sound during operation	<ul style="list-style-type: none"> <li>• A hissing sound is generated when there is Streamer discharge during Streamer operation. Depending on usage, the sound may lessen or change to a crackling, whirring or guzzling sound. However, this is normal. If the sounds are an issue, try moving the unit to a different location.</li> <li>• You can also set the Streamer output to Low. (▶Page 21, 22)</li> </ul>
Whistling and fluttering sound during operation	<ul style="list-style-type: none"> <li>• <b>Is there a buildup of dust on the pre-filter?</b> → Clean this part. (▶Page 27)</li> <li>• <b>Is the dust collection filter clogged up?</b> → Please perform maintenance. (▶Page 28) Depending on usage conditions, the dust collection filter may become clogged up, shortening its service life. (▶Page 6) If the problem persists even after cleaning, replace the dust collection filter. (▶Page 29)</li> </ul>
Operating sound is loud	<ul style="list-style-type: none"> <li>• <b>Is the dust collection filter properly attached?</b> → If it is not properly attached, operating sounds may become louder. (▶Page 29)</li> </ul>

■ **Indicator lamps**

Phenomenon	Check points
Odour sensor lamp blinks	<ul style="list-style-type: none"> <li>• <b>Is the deodorising filter attached?</b> → Attach the deodorising filter. (▶Page 14)</li> </ul>
Communication lamp remains red	<ul style="list-style-type: none"> <li>• <b>Is the router turned off?</b> → Please turn the router on.</li> <li>• <b>Are you using a different router from before?</b> → Perform connection settings again with the new router. (▶Page 16 - 17)</li> <li>• <b>Is the router connected to a network?</b> → Check the network connection.</li> </ul> <ul style="list-style-type: none"> <li>• <b>The signal between the router and the unit may be weak.</b> → Move the router nearer to the unit. (▶Page 16 - 17)</li> </ul>
The Communication lamp blinks red	<ul style="list-style-type: none"> <li>• <b>An electrical component may be malfunctioning.</b> → Press  to turn off the Communication lamp, then turn it on again. If the Communication lamp blinks again after about 3 minutes, an electrical component is malfunctioning. Contact the place of purchase.</li> </ul>

# Troubleshooting

Phenomenon	Check points
Indicator lamps do not light up	<p> • <b>Is the indicator lamp brightness set to OFF?</b>                      → To turn the lamps on, please set the indication lamp brightness to BRIGHT or DIM. <a href="#">▶Page 11</a></p>
PM2.5 sensor lamp remains orange or red	<p> • <b>Is there a buildup of dust in or around the air intake of the PM2.5 sensor or the surrounding area?</b>                      → Vacuum off any dust from the air intake using a vacuum cleaner. <a href="#">▶Page 27</a></p> <p>• <b>Is the cover detached from the air intake for the PM2.5 sensor?</b>                      → Securely attach the cover. <a href="#">▶Page 27</a></p> <p>• <b>Is the lens for the PM2.5 sensor dirty?</b>                      → Wipe off dirt from the lens using a dry cotton bud or similar. <a href="#">▶Page 27</a></p> <p>• <b>Is any of the pre-filter dirty?</b>                      → Clean these parts. <a href="#">▶Page 27</a></p>
<p>The PM2.5 sensor lamp is always blue and does not change</p> <p>The PM2.5 concentration value displayed with the AIR MONITOR indicator is always "--", and Daikin eye remains blue and does not change.</p>	<p> • If the displayed value remains "--" even after you set the AIR MONITOR indicator to display the concentration of PM2.5, the PM2.5 sensor may be defective.                      → Contact the place of purchase.</p>
There is an odour but the odour sensor lamp remains blue	<p> • <b>Did an odour already exist around the time you inserted the power supply plug?</b>                      → The basic sensitivity of the odour sensor will be determined by odour levels in the first minute (approx.) after the power supply plug is inserted every time. <a href="#">▶Page 10</a></p> <p>To adjust the basic sensitivity of the odour sensor, unplug the power supply when the air is clean (odour-free), wait at least 5 seconds, then re-insert the power supply plug and turn the unit on again. This process adjusts the reference odour level that determines the sensitivity of the odour sensor.</p>
The Streamer lamp blinks	<p> • Please replace the Streamer units. <a href="#">▶Page 30</a>                      → Contact the place of purchase.</p>
Sometimes the Streamer lamp does not light up	<p> • Depending on the degree of air impurity, Streamer operation may turn OFF. <a href="#">▶Page 22</a></p> <p>• The Streamer lamp turns off when Streamer operation is OFF.</p> <p> • <b>Is Streamer output set to Low?</b>                      → If it is set to Low, the length of time the Streamer operates will be shorter than when Streamer output is set to Normal. <a href="#">▶Page 21, 22</a></p> <p>• <b>Is the unit operating in ECONO MODE?</b>                      → The Streamer lamp does not light up when the unit is in Monitoring mode during ECONO MODE. <a href="#">▶Page 25, 26</a></p>
The Streamer lamp blinks even though the Streamer unit has been replaced	<p> • <b>After replacement, was the power supply plug inserted while pressing FAN setting button on the unit?</b> <a href="#">▶Page 30</a></p> <p>• <b>Is the Streamer unit's connector properly installed?</b>                      [In case of improper installation]                      → Unplug the power supply, re-attach the connector, and attempt operation again. <a href="#">▶Page 30</a></p> <p>[In case of proper installation]                      An electrical part is faulty.                      → Contact the place of purchase.</p>

## ■ Air purifying function

Phenomenon	Check points
Air purifying capacity is reduced	<ul style="list-style-type: none"> <li> • <b>Is the unit surrounded by obstacles, or positioned in a place where airflow cannot reach?</b> → Choose a position that is obstacle-free and from where airflow can reach all areas of the room.</li> <li>• <b>Are the louvres closed?</b> → Please open the louvres. <a href="#">▶Page 18</a></li> <li>• <b>Any of the pre-filter dirty?</b> → Clean these parts. <a href="#">▶Page 27</a></li> <li>• <b>Is the dust collection filter dirty?</b> → Clean this part. <a href="#">▶Page 28</a></li> </ul>
The air outlet is emitting an odour	<ul style="list-style-type: none"> <li> • <b>An air purifier collects dust and odours from the entire room. In case the air purifier is used in an environment where there are strong odours or the odours are generated continuously, there are cases where odours are attached to the filters and the unit, and will be emitted for weeks or months.</b></li> </ul>
	<ul style="list-style-type: none"> <li> • <b>Is there anything in the room that constantly produces odours?</b> (Paint, new furniture, wallpaper, aerosols, cosmetics, medicine, aromatic substances, aroma oils, cigarettes, roasted meat, etc.) → As continuously emitted odours cannot be completely eliminated, you should ventilate the room at the same time or run the unit in a well-ventilated room until the odour disappears.</li> <li>• <b>Is the room temporarily filled with strong odours due to something such as many people smoking or cooking?</b> → The odour will gradually decrease as the unit operates.</li> <li>• <b>Have you moved the unit from another room?</b> → Odour from the room the unit was previously in may still be present. Keep operating until the odour disappears.</li> <li>• <b>Are odours coming from the deodorising filter or dust collection filter?</b> → Please conduct maintenance on each part. <a href="#">▶Page 28, 29</a></li> <li>• In some cases the air outlet may emit a slight odour as trace amounts of ozone are generated during Streamer discharge or Active Plasma Ion discharge. However, the amount is negligible and is not harmful to your health.</li> <li>• If an odour is emitted when using the unit for the first time, set the FAN setting to Turbo and operate until the odour disappears. <a href="#">▶Page 19</a></li> </ul>
No air is being emitted	<ul style="list-style-type: none"> <li> • <b>Is the air outlet or an air inlet blocked? If they are not blocked, an electrical part is faulty.</b> → Contact the place of purchase.</li> </ul>
Airflow rate cannot be adjusted	<ul style="list-style-type: none"> <li> • <b>Is the odour sensor lamp blinking?</b> → Please properly attach the filter fixing unit and deodorising filter. <a href="#">▶Page 14</a></li> </ul>
The AIR MONITOR indicator always indicates a high humidity level when the humidity display is selected	<ul style="list-style-type: none"> <li> • <b>Is the unit positioned next to a window or in a location exposed to cold wind?</b> → There is a possibility that only the air surrounding the unit is of high humidity. Try moving the unit to a different location.</li> </ul>
	<ul style="list-style-type: none"> <li> • Room with poor sunlight or poor ventilation or rooms close to wet areas, such as the bathroom, become humid easily, so these rooms tend to have a higher humidity.</li> <li>• Immediately after starting operation, the humidity may be displayed higher than it actually is, depending on the condition of the air inside the unit. Continue operation for about 1 hour and check again.</li> </ul>

# Troubleshooting

<p>The values of humidity and temperature indicated on the unit differ from other hygrometers and thermometers</p>	<p><input checked="" type="checkbox"/> The display on the unit may differ from that of the other hygrometers or thermometers.</p> <ul style="list-style-type: none"> <li>• This is because the humidity and temperature become uneven even in the same room due to the flow of air.</li> </ul> <p>Please use the AIR MONITOR indicator as a rough estimate.</p>
--	---

## ■ Wireless LAN connection

Phenomenon	Check points
<p>The unit (air purifier) can't be found with the app</p>	<p><input checked="" type="checkbox"/> • Perform connection settings again (▶Page 16,17)</p> <ul style="list-style-type: none"> <li>• Move the router closer to the air purifier.</li> </ul>
<p>Cannot operate the unit with smartphone even though the Communication lamp is lit green.</p>	<p><input checked="" type="checkbox"/> • Check the internet connection of your router.</p>

## ■ Other

Phenomenon	Check points
<p>The unit turns on and off on its own.</p>	<ul style="list-style-type: none"> <li>• <b>Is someone else operating the unit with a smartphone?</b></li> <li>• <b>Did you set the schedule timer using “ONECTA”?</b> <ul style="list-style-type: none"> <li>→ If  is pressed on the unit, the Communication lamp will turn off, and operation via smartphone and the schedule timer will be disabled.</li> </ul> </li> </ul>
<p>The fan stops midway through unit operation</p>	<p><input checked="" type="checkbox"/> • When the unit switches to Monitoring mode during operation in ECONO MODE, the fan turns on and off repeatedly. (▶Page 20)</p> <p><input type="checkbox"/> • <b>Are the pre-filters, filter fixing unit, and dust collection filter attached before the unit is operated?</b>  <b>The fan is configured to stop in order to protect electrical components if a part is not properly attached.</b>          → If a part is not attached, unplug the unit and attach all the parts before turning the unit on again.</p>
<p>The sound of Streamer discharge can no longer be heard</p>	<p><input checked="" type="checkbox"/> • Depending on the degree of air impurity, Streamer operation may turn OFF. (▶Page 22)</p> <p><input type="checkbox"/> • <b>Is Streamer output set to Low?</b> (▶Page 21, 22)</p>
<p>There is interference on our TV screen</p> <p>Noise is generated on the radio</p>	<p><input type="checkbox"/> • <b>Is the TV or radio positioned within 2m of the unit, or is an indoor antenna positioned near the unit?</b></p> <ul style="list-style-type: none"> <li>• <b>Are the power supply cord or antenna cable of the TV or radio routed near the unit?</b>              → Keep the unit as far as possible from the TV, radio or antenna.</li> </ul>
<p>Just inserting the power supply plug causes operation to start</p>	<p><input type="checkbox"/> • <b>Did you disconnect the power supply plug during a power failure or when a sudden voltage fluctuation occurred? Or did you stop the unit by disconnecting the power supply plug during the last operation?</b>          → The auto-restart function automatically resumes operation.</p>

# Specifications

Model name	MC80ZBFVM			
Power supply	Single phase 50Hz 220-240V / 60Hz 220-230V			
Operation mode	Air Purifying			
	Turbo	Standard	Low	Quiet
Power consumption (W)	80	16	11	9
Operating sound (dB)	55	34	25	19
Airflow rate (m <sup>3</sup> /h)	480	210	132	84
Coverage area (m <sup>2</sup> )	62			*1
	124			*2
CADR (m <sup>3</sup> /h)	480			*3
External dimensions (mm)	630(H)× 315(W)× 315(D)			
Weight (kg)	9.8			
Power supply cord length (m)	2.0			

- **These specification values are applicable to both 50Hz 220–240V and 60Hz 220–230V.**
- **Even when the power is off, approx. 1W (\*4) of power is consumed to run the microcomputer.**
- **This appliance is designed to be used in residential or commercial areas.**
- **A-weighted emission sound pressure level is below 70 dB (A).**



\*1. Coverage area was calculated in accordance with JEM1467. (when FAN setting is Turbo)

\*2. Coverage area was calculated in accordance with NRCC-54013 standard using cigarette smoke CADR that was tested according to JEM1467. (when FAN setting is Turbo)

\*3. CADR value was tested accordance to JEM 1467 Appendix C. (when FAN setting is Turbo)

\*4. If the wireless LAN connection adaptor function is OFF.

# Separately sold parts

<span style="border: 1px solid black; border-radius: 15px; padding: 2px 5px;">Replacement Part</span>	
<p><b>Dust collection filter</b> (1 unit) Part no: BAFT501A</p>	<p><b>Caster</b> (4 units) Part no: KKS080B41</p>
	
<ul style="list-style-type: none"> <li>• Replace in about 10 years</li> <li>• Catches dust and pollen.</li> </ul>	<ul style="list-style-type: none"> <li>• Installation location is changed manually.</li> </ul>

- Failure to maintain part properly may result in:
  - Reduced air purifying capacity
  - Reduced deodorising capacity
  - Emission of odours
- Please refer to the installation manual sold with the caster wheels for its installation
- Please install / remove the separately sold parts with the unit unplugged
- Observe local waste separation rules when disposing of the dust collection filter (made of polyester and polypropylene).

## ■ Disposal requirements



Your product is marked with this symbol. This symbol means that electrical and electronic products shall not be mixed with unsorted household waste.  
Do NOT try to dismantle the system yourself: the dismantling of the system must be done by an authorized installer and must comply with applicable legislation.

Disposal of this product must be done in accordance with relevant local and national legislation. Units must be treated at a specialised treatment facility for re-use, recycling and recovery. By ensuring correct disposal, you will help to prevent potential negative consequences for the environment and human health. Please contact the installer or local authority for more information.

# MEMO

---

# MEMO

---

# MEMO

---

- In the event that there is any conflict in the interpretation of this manual and any translation of the same in any language, the English version of this manual shall prevail.
- The manufacturer reserves the right to revise any of the specification and design contain herein at any time without prior notification.
- All images are for illustration purposes only.

---

***DAIKIN MALAYSIA SDN. BHD.***

Lot 60334, Persiaran Bukit Rahman Putra 3,  
Taman Perindustrian Bukit Rahman Putra,  
47000 Sungai Buloh, Selangor Darul Ehsan,  
Malaysia.

***DAIKIN EUROPE N.V.***

Zandvoordestraat 300, B-8400 Oostende,  
Belgium